

#10 SEW/SF2
WIRE #4102

#6073 FUSE BLOCK (2 EA)
600V 30A 3P
USES (6) 30A
CLASS CC FUSES #6076-1

PWR CONN BLOCK
#4549-9


POWER REQ'TS

208 VOLTS
3 PHASE
60 HERTZ
52 MAX AMPS
16225 WATTS

WIRE SIZES

NOTE: ALL WIRES TO BE
TYPE SEW/SF2, #10 AWG
MINIMUM UNLESS NOTED

#6311
30A RELAY
208-240V
COIL
DPST-NO

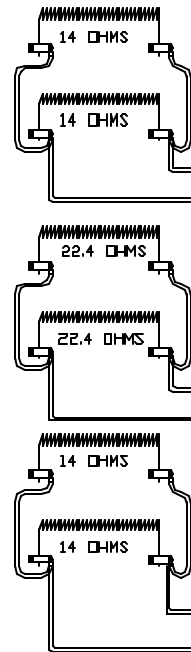

L1 L2 L1 L3 L2 L3

#20 GA
#4609

#6344-1
CONTROL
POWER
ON/OFF
SWITCH
120V 240V

CONTROL WIRING NOTE

ALL CONTROL WIRES
#20 AWG #4609
UNLESS OTHERWISE NOTED

#6355
30A RELAY
W/12V
DC COIL

#20 GA
#4609

TYPE K T/C
6750-2

#6060-1
#20GA WIRE
MULTI-COND

#6770-CONTROL
TRANSFORMER
OUTPUT=24VAC

FUSE
#6726
1/2 AMP

CONE FIRE
SENTRY 2.0

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
EL707111BASTB	4	SIDE TOP/BOT
EL707111BASM	2	SIDE MID

UL/CUL LISTED

2350°F

REV	DATE	BY	DESCRIPTION
-	01-30-01	DTB	
B	8/27/01	DTB	MOVED PWR SW TO CENTER REL, DEL GRND
C	12/02/02	DTB	MOVED FUSE TO TRANS LEAD

SWITCH BOX ASSY- 40986-3

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

WIRING DIAGRAM

208V, 3 PHASE, 60HZ, 16225WATTS

PART NO
707111BA00

DRAGON 242724

REV
C