

WIRING NOTE

ALL WIRES #14 AWG.  
TYPE SEW/SF2 MINIMUM  
UNLESS OTHERWISE NOTED

PART NO


S0848

**CAUTION**

TO PROVIDE CONTINUED  
PROTECTION AGAINST THE  
RISK OF ELECTRIC SHOCK,  
CUSTOMER'S POWER  
SUPPLY MUST BE  
PROPERLY GROUNDING.

NOTE: GROUNDING SCREW  
TO HAVE A GREEN COLORED  
SLOTTED AND/OR HEX HEAD  
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE  
INSULATED WIRES MARKED (X)  
TO BE COLORED GREEN, WITH  
OR WITHOUT ONE OR MORE  
YELLOW STRIPES.

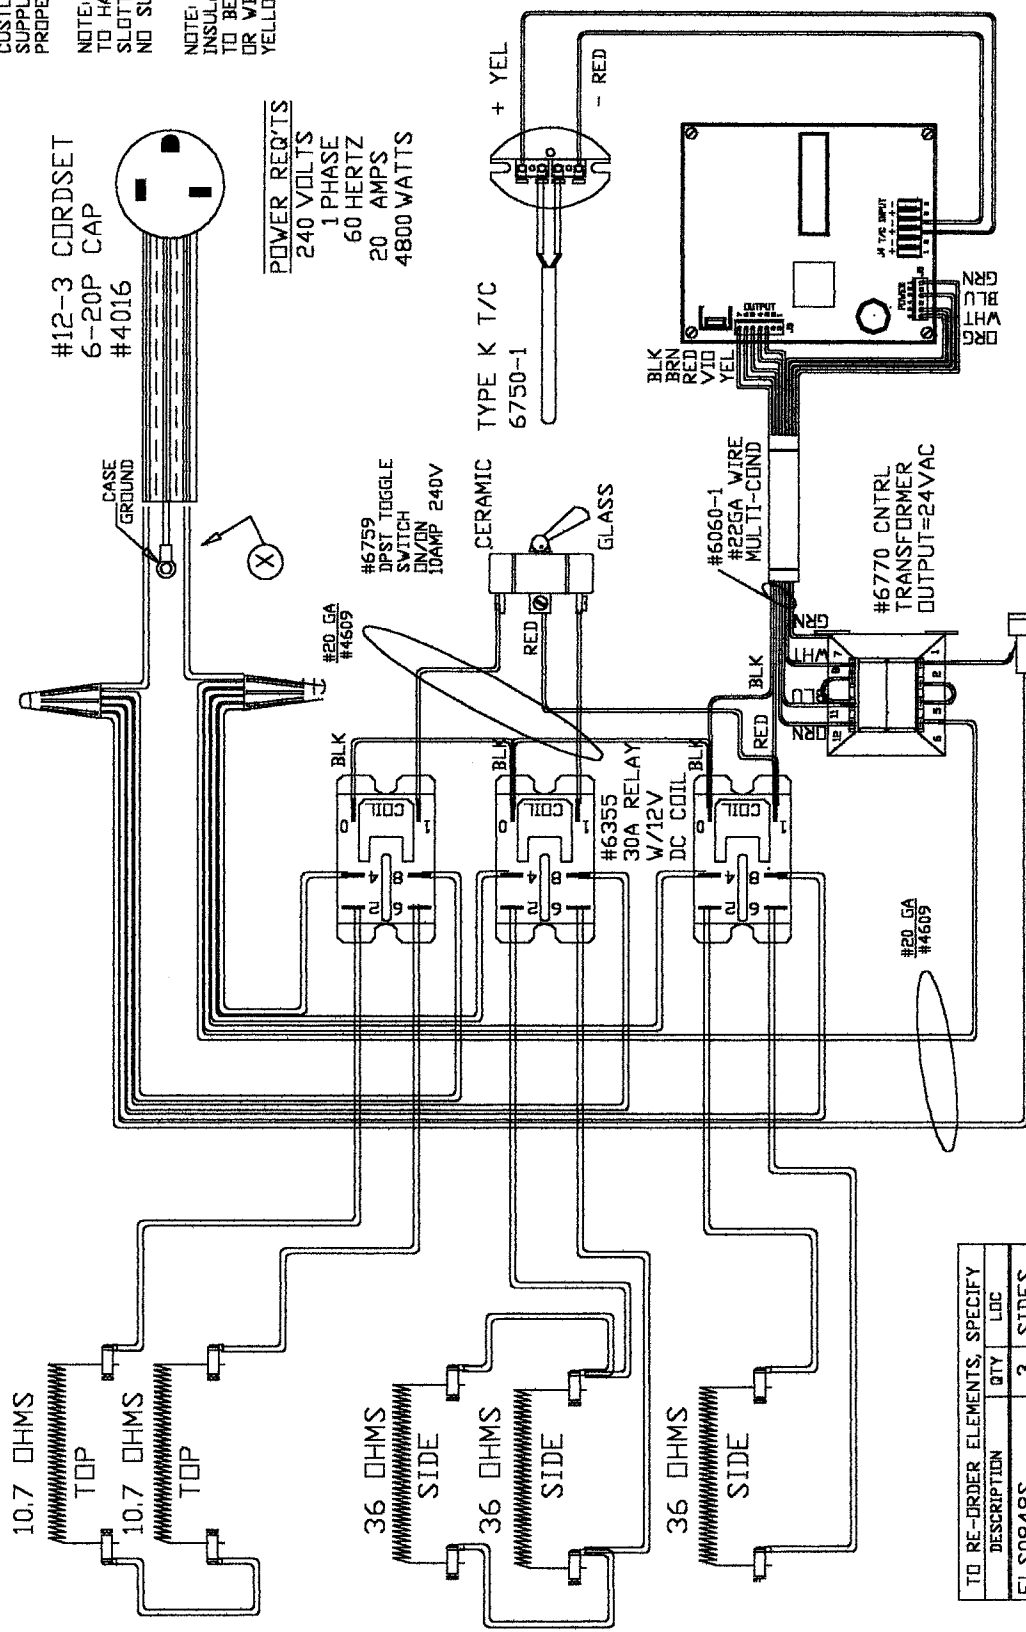

**POWER REQ'TS**  
240 VOLTS  
1 PHASE  
60 HERTZ  
20 AMPS  
4800 WATTS

#12-3 CORDSET  
6-20P CAP  
#4016

TYPE K T/C  
6750-1

TO RE-ORDER ELEMENTS, SPECIFY	DESCRIPTION	QTY	LOC
ELS0848S		3	SIDES
ELS0848T		2	TOP

CONE FIRE  
SENTRY 2.0 2350° F

I/C

SWITCH BOX ASSY- 4978-2

PARAGON INDUSTRIES  
2011 SOUTH TOWN EAST BLVD  
MESQUITE, TEXAS 75149

WIRING DIAGRAM

PART NO  
S0848

REV  
--

FILE