

S0848 -/

PART NO


WIRING NOTE


ALL WIRES #14 AWG,
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

CAUTION

TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDED.

NOTE: GROUNDING SCREW
TO HAVE A GREEN COLORED
SLOTTED AND/OR HEX HEAD
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE
INSULATED WIRES MARKED 
TO BE COLORED GREEN WITH
OR WITHOUT ONE OR MORE
YELLOW STRIPES.

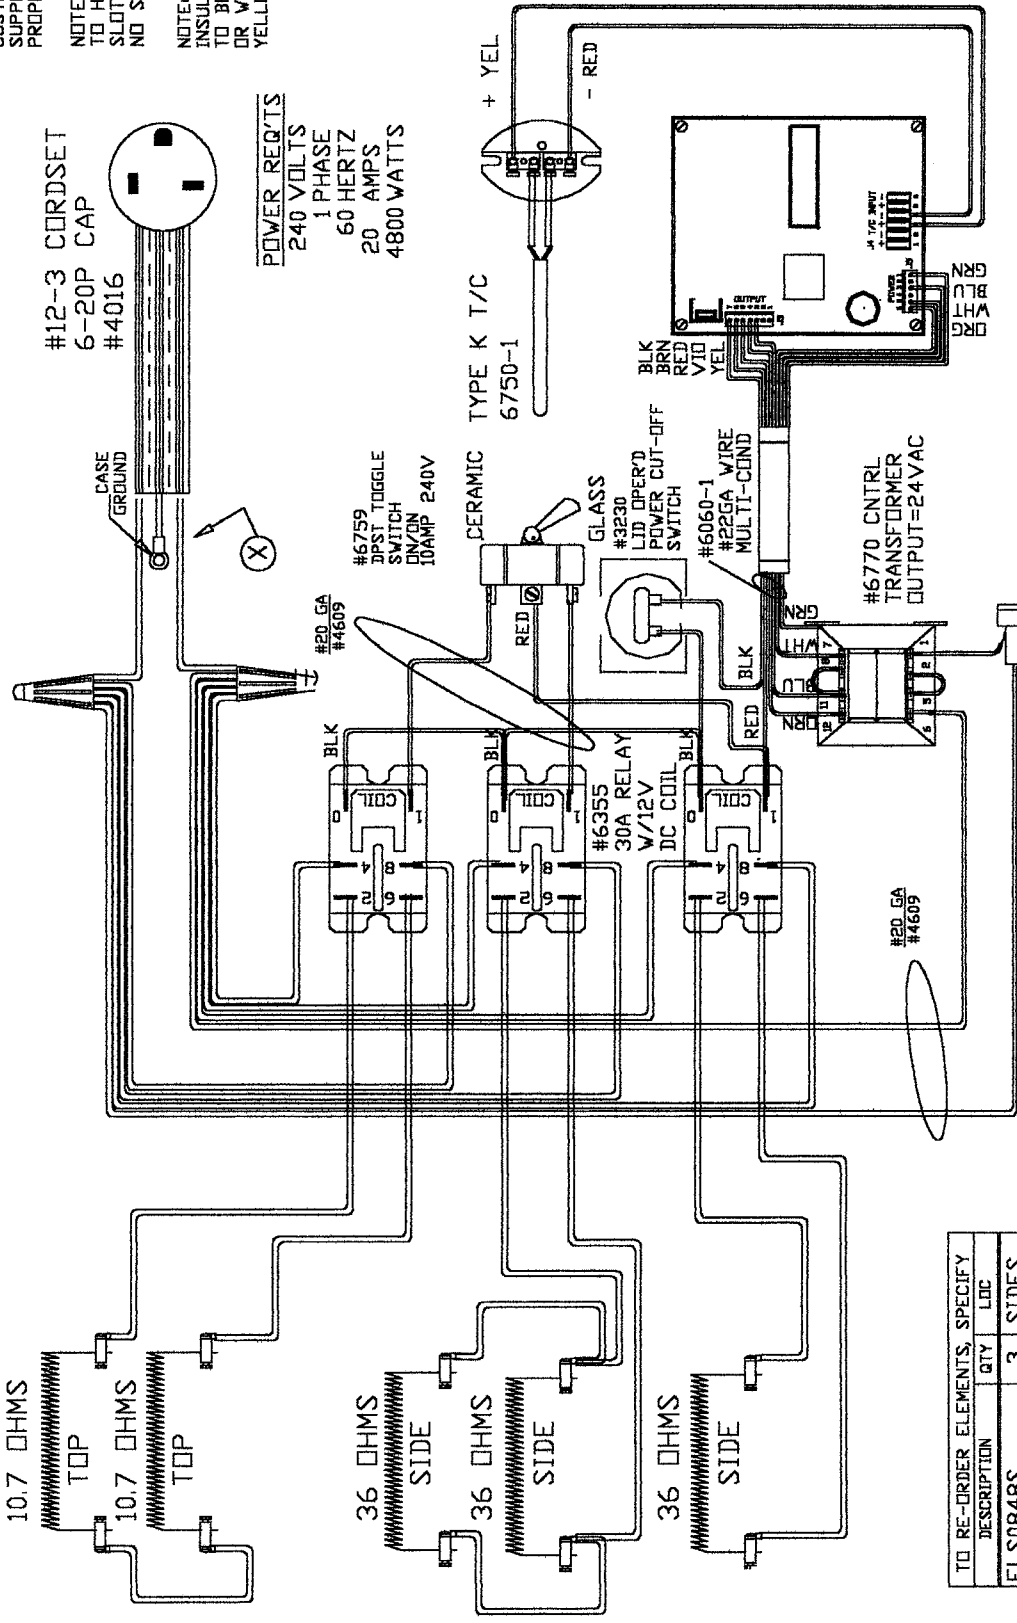

POWER REQTS
240 VOLTS
1 PHASE
60 HERTZ
20 AMPS
4800 WATTS

#12-3 CORDSET
6-20P CAP
#4016

TYPE K T/C
6750-1

I/C
CONE FIRE
SENTRY 2.0
2350° F

TO RE-ORDER ELEMENTS, SPECIFY

DESCRIPTION	QTY	LIC
ELS0848S	3	SIDES
ELS0848T	2	TOP

REV	DATE	BY	DESCRIPTION
6-9-03	RLG		

SWITCH BOX ASSY- 4978-2
PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

WIRING DIAGRAM

240V, 1PHASE, 60HZ, 4800WATTS

PART NO

S0848 -/

DP1613 SEN-C

REV

FILE