


TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
EL 309111ETB	4	TOP/BOT
EL 309111EM	2	MID

10 GA WIRE
SEW




POWER REQ'TS
240 VOLTS
3 PHASE
60 HERTZ
39 AMPS
14400 WATTS

WIRE SIZES


NOTE: ALL WIRES TO BE
TYPE SEW/SF2, #10 AWG
MINIMUM UNLESS NOTED

#6311
30A RELAY
208-240V
COIL
DPST-NO




L1

L2



L1

L3




L2

L3

CONTROL WIRING NOTE
ALL CONTROL WIRES
#20 AWG #4609
UNLESS OTHERWISE NOTED

CAUTION


TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDED.

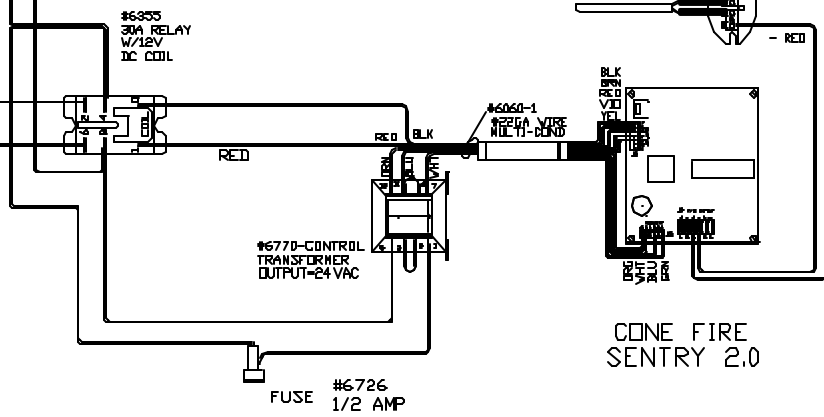

TYPE K T/C
6750-1

+ YEL

- RED



2350°F
CONE FIRE
SENTRY 2.0

FUSE #6726
1/2 AMP

REV	DATE	BY	DESCRIPTION
-	12/19/01	DTB	
A	1/7/02	DTB	CORRECTED EL VALUES

SWITCH BOX ASSY- 42017-2

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

WIRING DIAGRAM

240V, 3 PHASE, 60HZ, 14400WATTS

PART NO.	REV
309111EA00	A
VIK283-SEN-C	