

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELPMT13S	2	SIDES

HIGH TEMP CS/HSJ/HSJD
 #12-3 CORDSET
 6-20P CAP
 #60049


POWER REQ'TS
 240 VOLTS
 1 PHASE
 60 HERTZ
 15 AMPS
 3600 WATTS

CAUTION

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

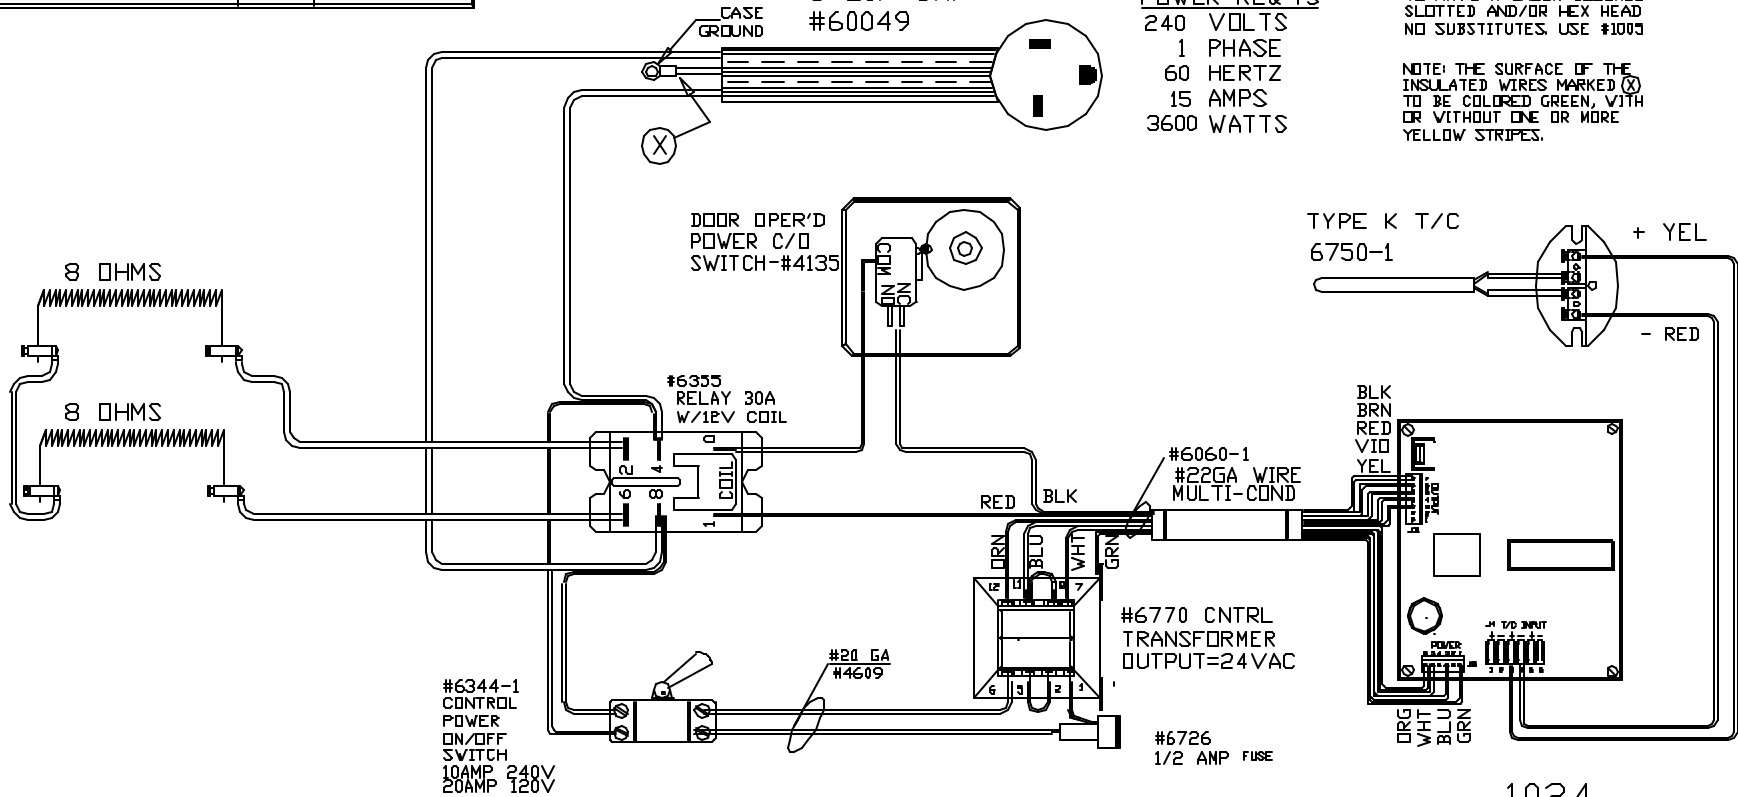

1024

SENTRY 2.0

MAX. TEMP.
 2350°F

WIRING NOTE

ALL WIRES #14 AWG,
 TYPE SEW/SF2 MINIMUM
 UNLESS OTHERWISE NOTED

NOTE: PLEASE REFER TO THIS NUMBER WHEN ORDERING PARTS FOR THIS KILN

REV	DATE	BY	DESCRIPTION	SWITCH BOX ASSY- 42073	WIRING DIAGRAM	PART NO.	REV
-	6/28/04	DTB		PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	240V, 1 PHASE, 60HZ, 3600WATTS	PMT13	-
						HT13X8.5X13.5	FILE