

WIRING NOTE

ALL WIRES #14 AWG,  
TYPE SEW/SF2 MINIMUM  
UNLESS OTHERWISE NOTED

CAUTION


TO PROVIDE CONTINUED  
PROTECTION AGAINST THE  
RISK OF ELECTRIC SHOCK,  
CUSTOMER'S POWER  
SUPPLY MUST BE  
PROPERLY GROUNDED.

NOTE: GROUNDING SCREW  
TO HAVE A GREEN COLORED  
SLOTTED AND/OR HEX HEAD  
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE  
INSULATED WIRES MARKED ⊗  
TO BE COLORED GREEN, WITH  
OR WITHOUT ONE OR MORE  
YELLOW STRIPES.

MS8  
PILOT LIGHT

LT3K-120  
120V 60HZ  
KILN SITTER  
W/LIM. TIMER  
4" TUBE  
ASSY KS7

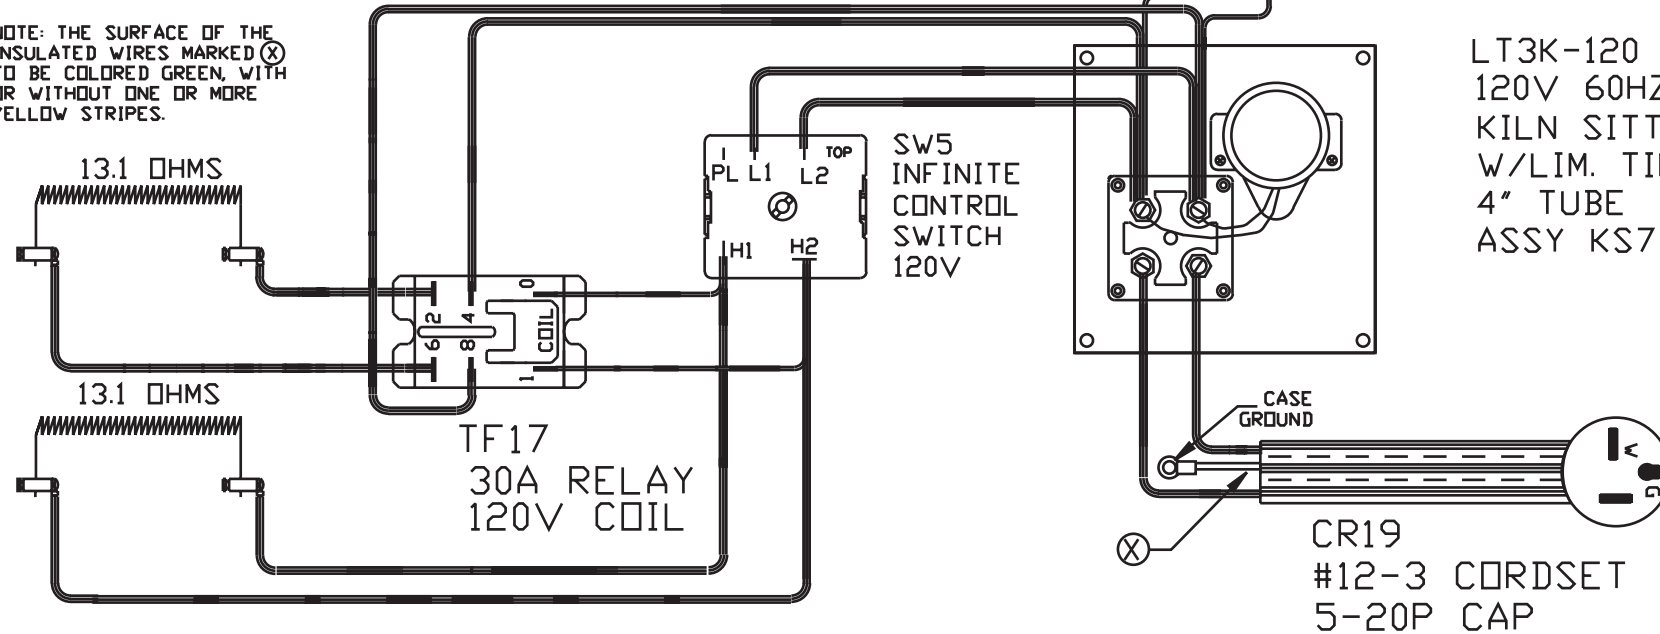

CR19  
#12-3 CORDSET  
5-20P CAP

POWER REQ'TS

120 VOLTS  
1 PHASE  
60 HERTZ  
18.3 AMPS  
2200 WATTS  
MAX TEMP 2300° F

UL/CUL LISTED

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELA119	2	SIDE

COMMENTS

PARAGON INDUSTRIES  
2011 SOUTH TOWN EAST BLVD  
MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION  
6 SIDES, 11" DIA, 9" DP  
120V, 1PH, 60HZ, 18A, 2160W

<u>PART NO.</u>	S1193	<u>REV</u>	-
WIRING DIAGRAM			