


CAUTION

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #100S

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

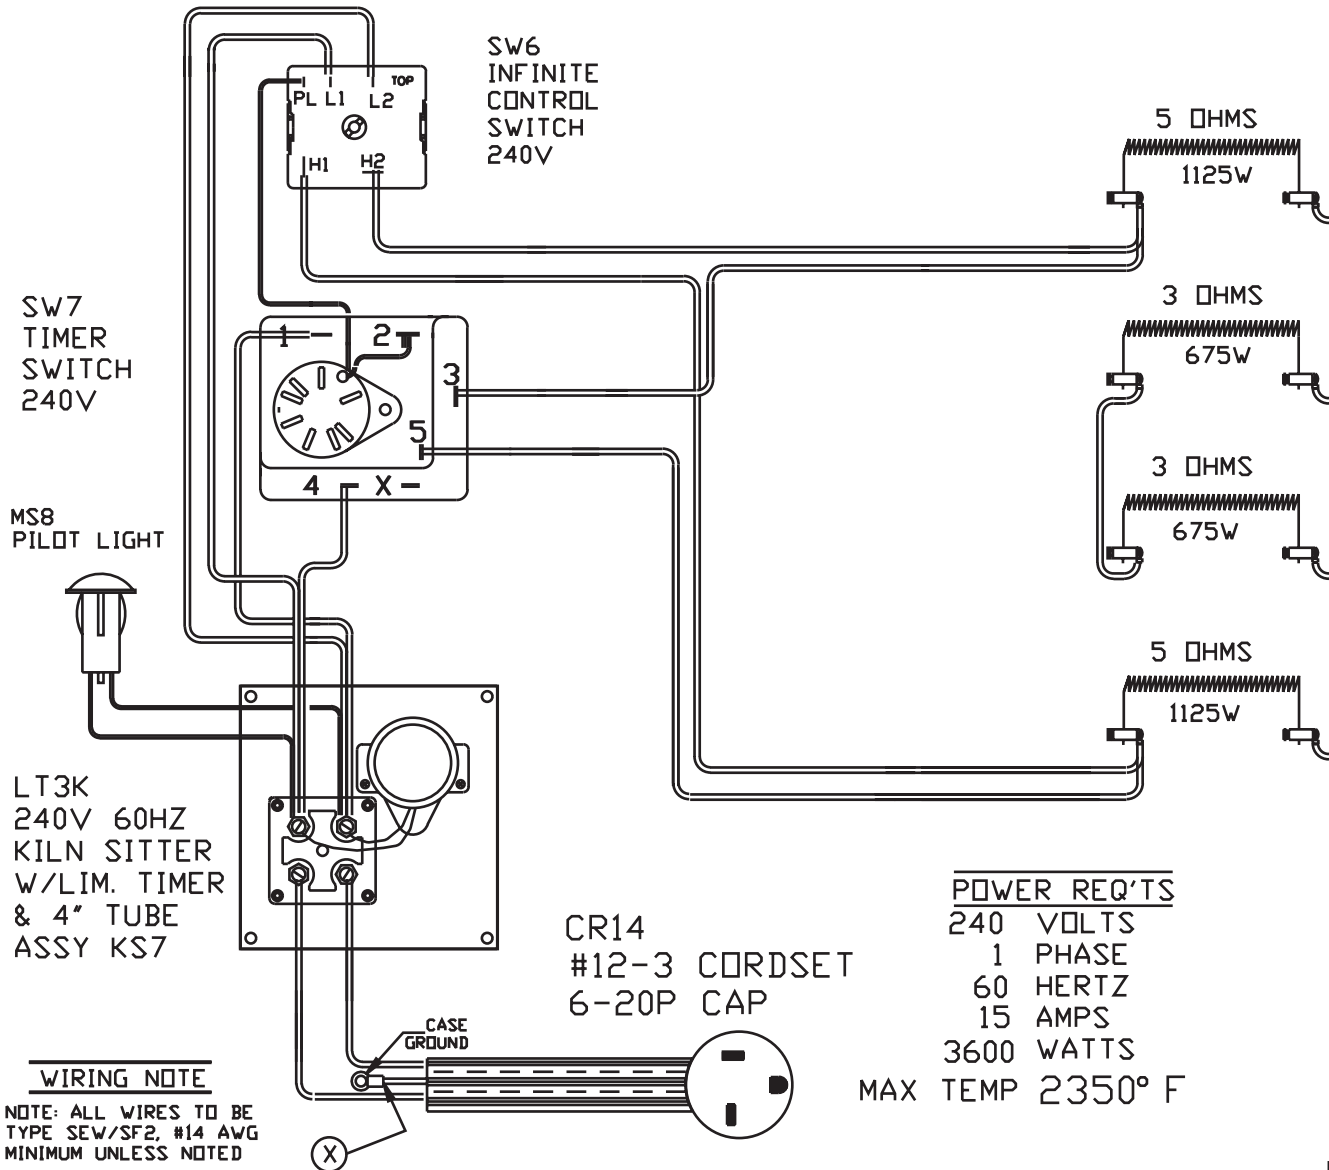

SW7
TIMER
SWITCH
240V

SW6
INFINITE
CONTROL
SWITCH
240V

MS8
PILOT LIGHT

LT3K
240V 60HZ
KILN SITTER
W/LIM. TIMER
& 4" TUBE
ASSY KS7

CR14
#12-3 CORDSET
6-20P CAP

POWER REQ'TS

240 VOLTS
1 PHASE
60 HERTZ
15 AMPS
3600 WATTS
MAX TEMP 2350° F

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LDC
ELSNF663TB	2	TOP&BOT
ELSNF663M	2	MIDDLE

WIRING NOTE

NOTE: ALL WIRES TO BE TYPE SEW/SF2, #14 AWG MINIMUM UNLESS NOTED

UL/CUL LISTED

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	<u>PRODUCT DESCRIPTION</u> 7 SIDES, 13.5" DIA, 13.25" DP 240V, 1PH, 60HZ, 15A, 3600W	PART NO.	SNF663	REV	-
			WIRING DIAGRAM			