

CAUTION


TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED ⊗ TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

WIRING NOTE

ALL WIRES #14 AWG, TYPE SEW/SF2 MINIMUM UNLESS OTHERWISE NOTED

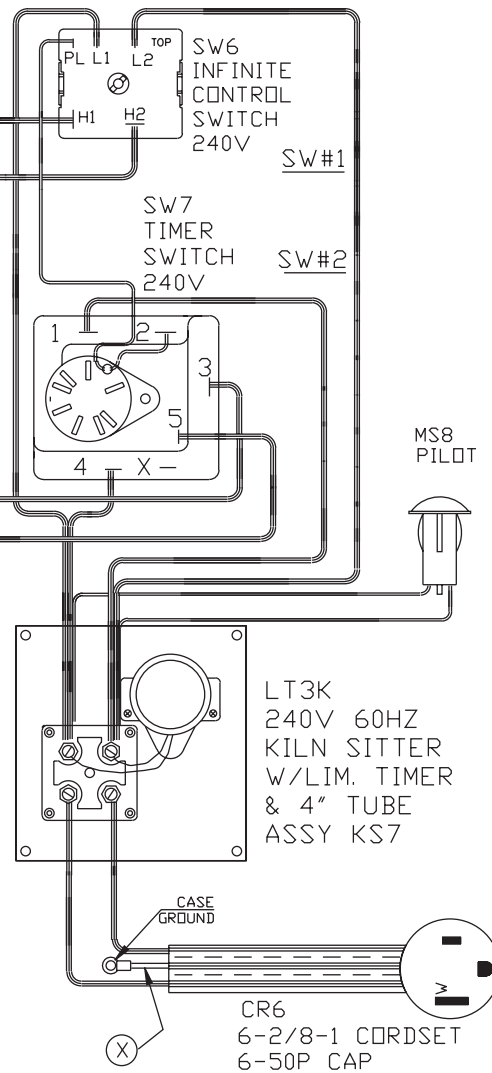

LT3K
240V 60HZ
KILN SITTER
W/LIM. TIMER
& 4" TUBE
ASSY KS7

CR6
6-2/8-1 CORDSET
6-50P CAP

POWER REQ'TS

240 VOLTS
1 PHASE
60 HERTZ
30 AMPS
7200 WATTS
MAX TEMP 2350° F

UL LISTED

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LDC
ELSNF823TB	4	TOP & BOTT
ELSNF823M	4	MID

COMMENTS

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION
8 SIDES, 16.5" DIA, 22.25" DP
240V, 1PH, 60HZ, 30A, 7200W

PART NO.	SNF823	REV	-
WIRING DIAGRAM			