


PART NO 306111G00

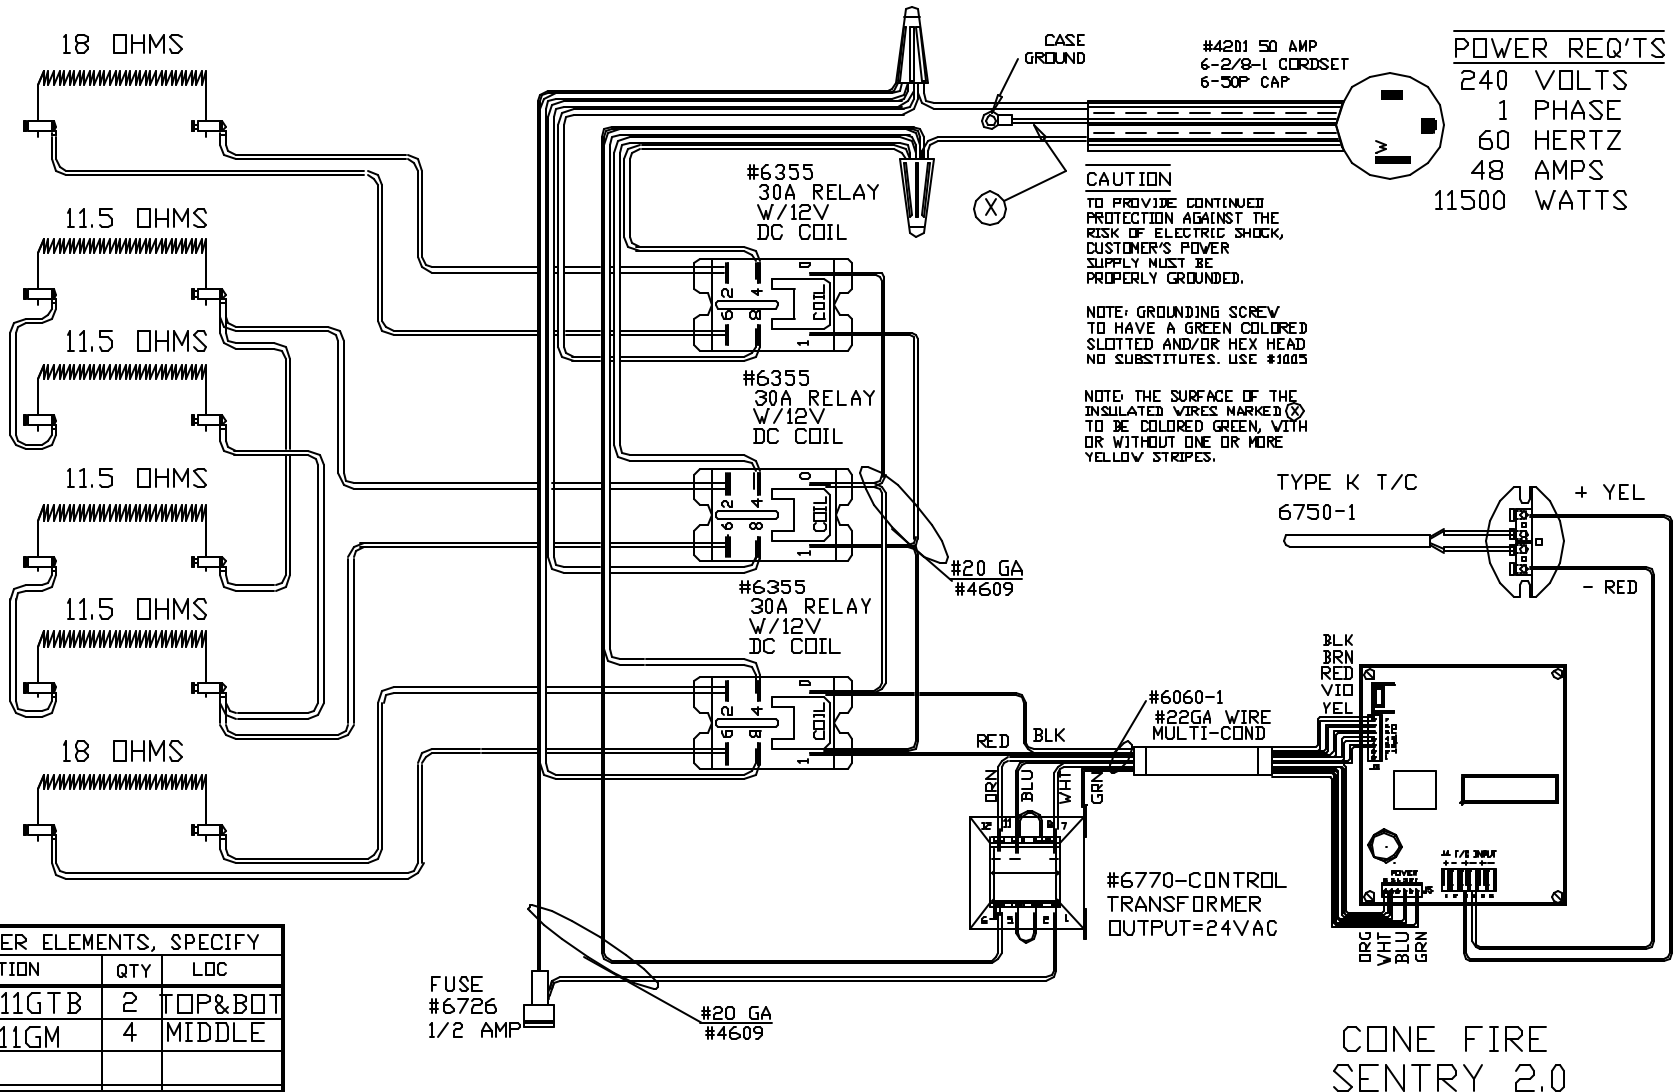

POWER REQ'TS
 240 VOLTS
 1 PHASE
 60 HERTZ
 48 AMPS
 11500 WATTS

CAUTION
 TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

TO RE-ORDER ELEMENTS, SPECIFY

| DESCRIPTION | QTY | LOC |
|-------------|-----|---------|
| EL306111GTB | 2 | TOP&BOT |
| EL306111GM | 4 | MIDDLE |

WIRING NOTE

NOTE: ALL WIRES TO BE TYPE SEW/SF2, 12 GA AWG MINIMUM UNLESS NOTED

NOTE: PLEASE REFER TO THIS NUMBER WHEN ORDERING PARTS FOR THIS KILN

CONE FIRE SENTRY 2.0
 CFG 21
 UL/CUL LISTED
 CATALOG STANDARD
 2150°F

| REV | DATE | BY | DESCRIPTION |
|-----|---------|-----|-------------|
| - | 3/25/02 | DTB | |
| | | | |
| | | | |
| | | | |

SWITCH BOX ASSY- 42022-1
 PARAGON INDUSTRIES
 2011 SOUTH TOWN EAST BLVD
 MESQUITE, TEXAS 75149

| WIRING DIAGRAM | | PART NO | REV |
|----------------|------------------|-----------|------|
| 240V, 1PHASE | 60HZ | 306111G00 | - |
| 11500WATTS | TNF283 SECTIONAL | | FILE |