

CAUTION


TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

WIRING NOTE

ALL WIRES #14 AWG, TYPE SEW/SF2 MINIMUM UNLESS OTHERWISE NOTED

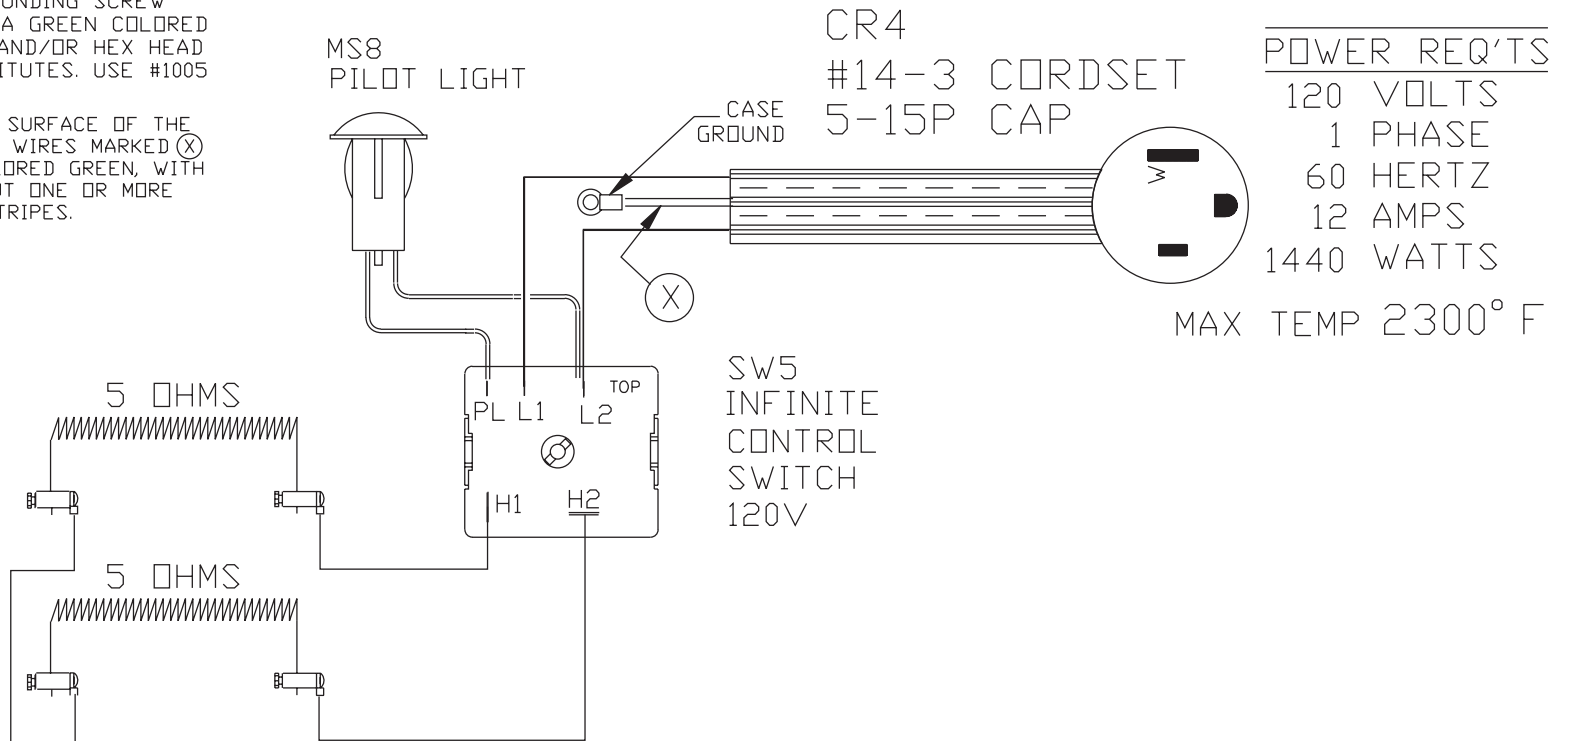

POWER REQ'TS

120 VOLTS  
1 PHASE  
60 HERTZ  
12 AMPS  
1440 WATTS

MAX TEMP 2300° F

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LDC
ELQ11	2	SIDES

UL/CUL LISTED

COMMENTS

PARAGON INDUSTRIES  
2011 SOUTH TOWN EAST BLVD  
MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION  
5.75"W, 6.25"H, 6"DP  
120V, 1PH, 60HZ, 12A, 1440W

PART NO. Q11A

REV  
-

WIRING DIAGRAM