

WIRING NOTE

ALL WIRES #14 AWG.
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

PART NO


S0848

CAUTION

TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDING.

NOTE: GROUNDING SCREW
TO HAVE A GREEN COLORED
SLOTTED AND/OR HEX HEAD
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE
INSULATED WIRES MARKED (X)
TO BE COLORED GREEN, WITH
OR WITHOUT ONE OR MORE
YELLOW STRIPES.

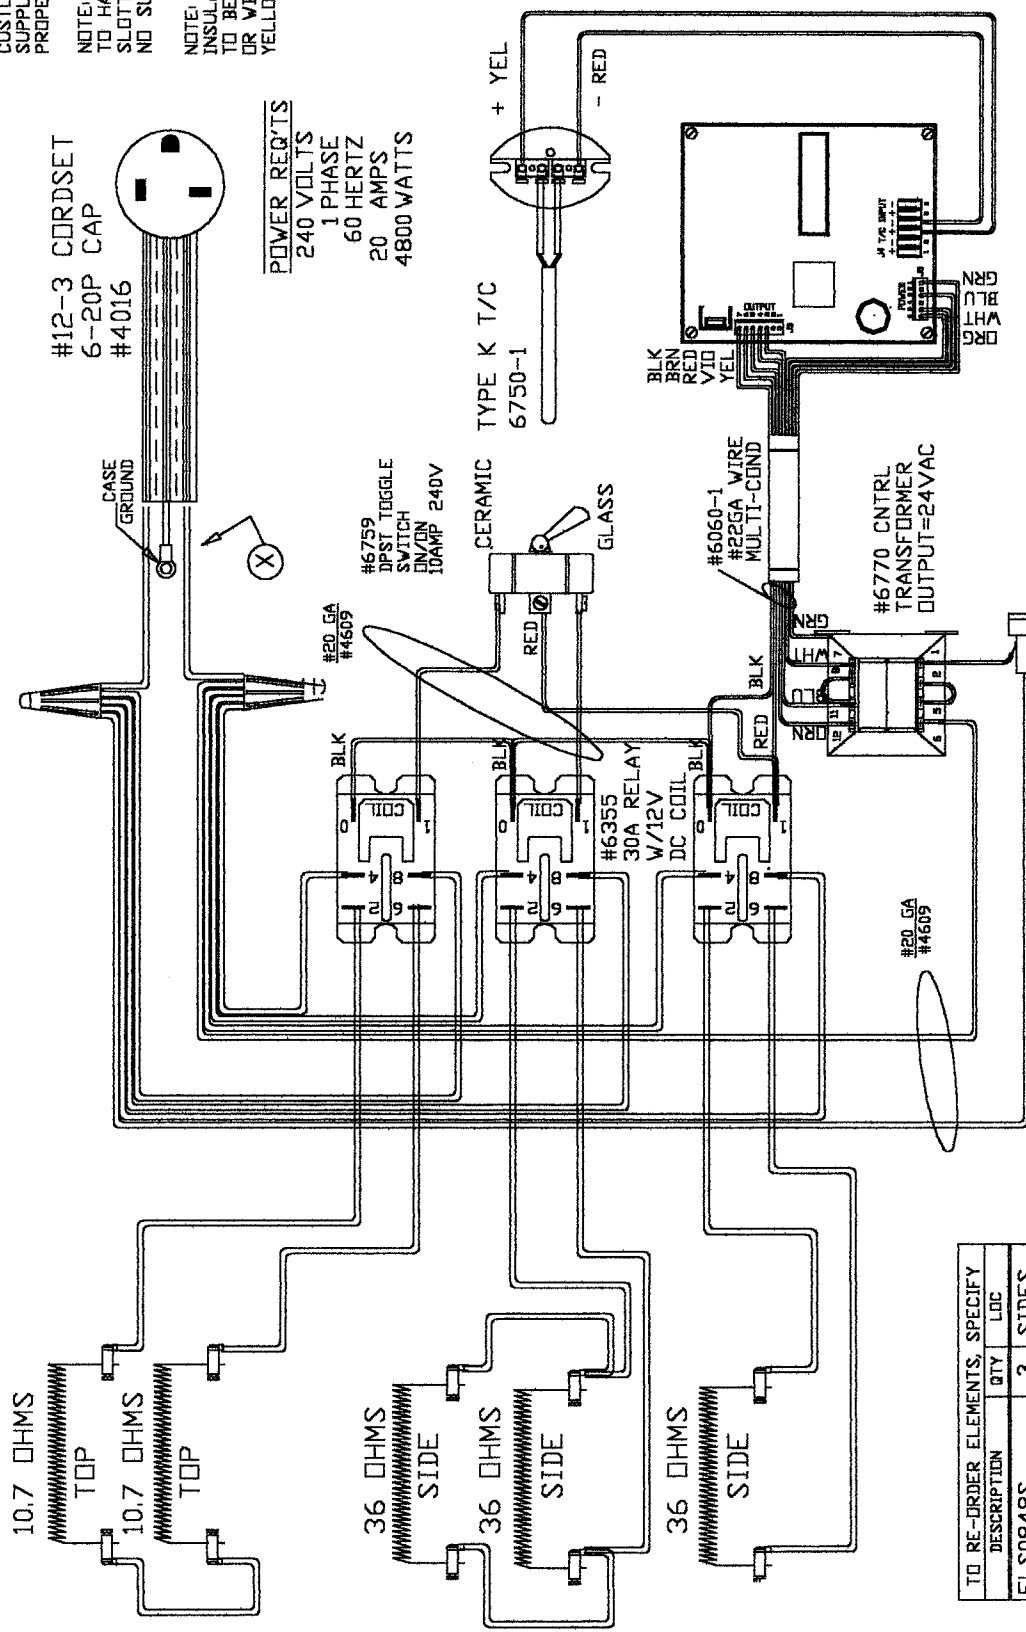

POWER REQ'TS
240 VOLTS
1 PHASE
60 HERTZ
20 AMPS
4800 WATTS

#12-3 CORDSET
6-20P CAP
#4016

TYPE K T/C
6750-1

CONE FIRE
SENTRY 2.0 2350° F

TO RE-ORDER ELEMENTS, SPECIFY	DESCRIPTION	QTY	LOC
ELS0848S		3	SIDES
ELS0848T		2	TOP

REV	DATE	BY	DESCRIPTION
6-9-03	RLG		

SWITCH BOX ASSY- 4978-2
PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

WIRING DIAGRAM

PART NO

S0848

REV

FILE