

S0848 -/

PART NO


WIRING NOTE


ALL WIRES #14 AWG,  
TYPE SEW/SF2 MINIMUM  
UNLESS OTHERWISE NOTED

CAUTION

TO PROVIDE CONTINUED  
PROTECTION AGAINST THE  
RISK OF ELECTRIC SHOCK,  
CUSTOMER'S POWER  
SUPPLY MUST BE  
PROPERLY GROUNDED.

NOTE: GROUNDING SCREW  
TO HAVE A GREEN COLORED  
SLOTTED AND/OR HEX HEAD  
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE  
INSULATED WIRES MARKED   
TO BE COLORED GREEN WITH  
OR WITHOUT ONE OR MORE  
YELLOW STRIPES.

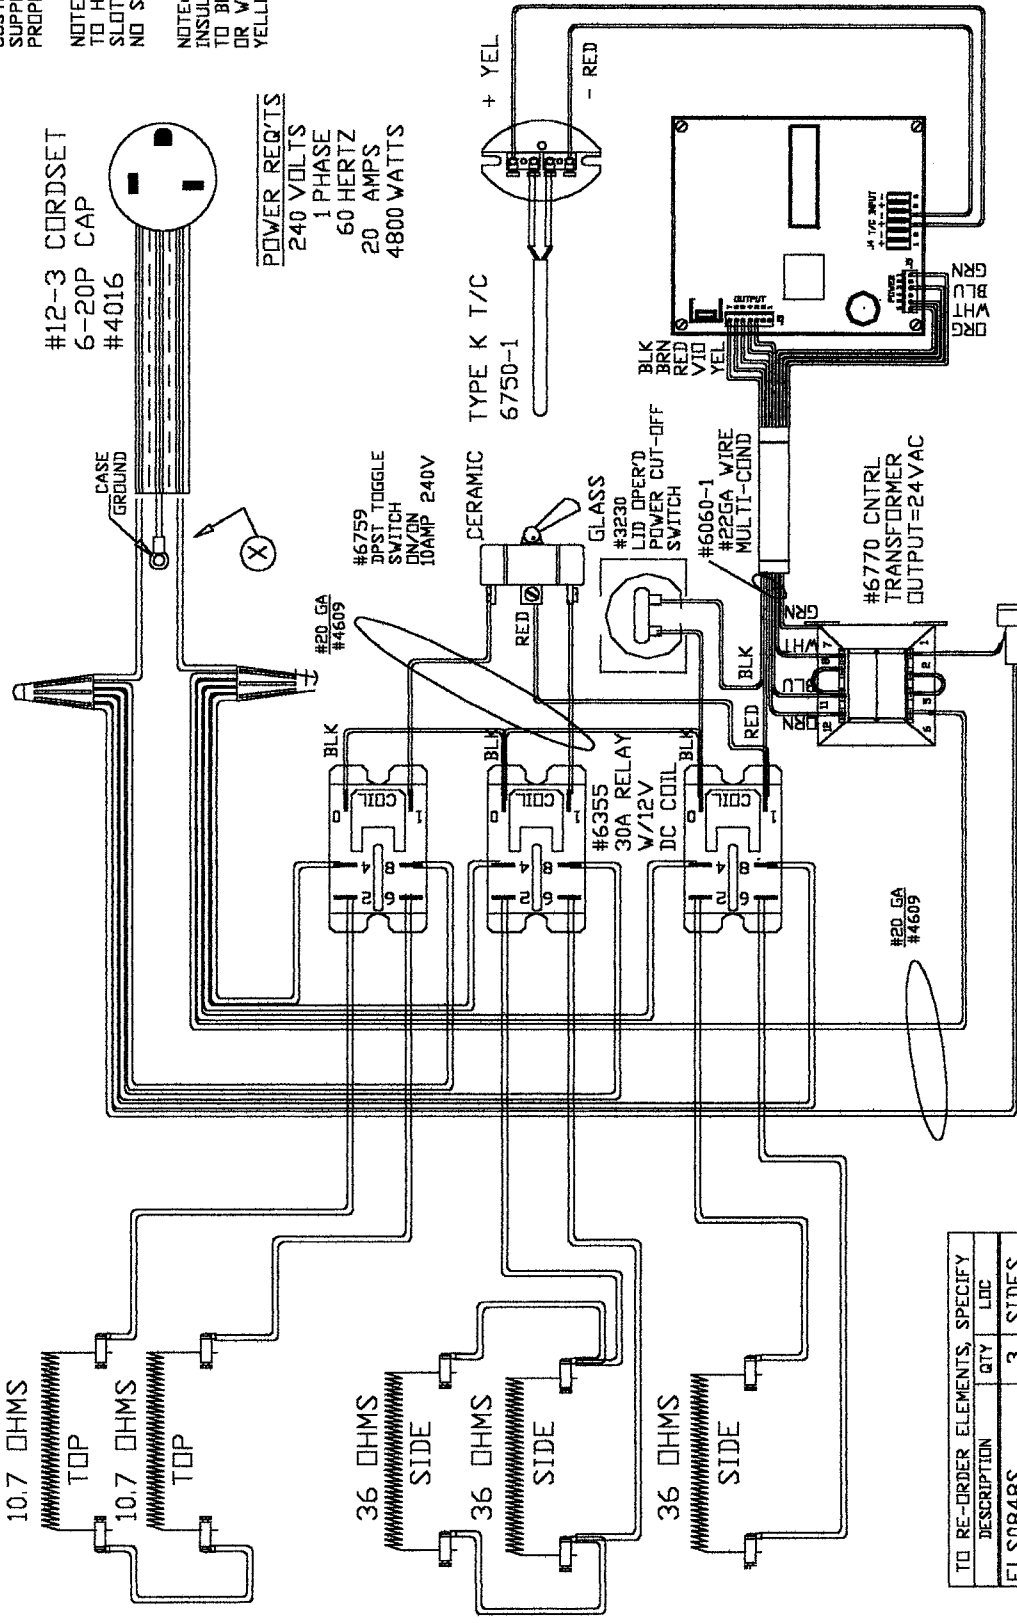

#12-3 CORDSET  
6-20P CAP  
#4016

POWER REQTS  
240 VOLTS  
1 PHASE  
60 HERTZ  
20 AMPS  
4800 WATTS

#6759  
3PST TOGGLE  
SWITCH  
ON/ON  
10AMP 240V

CERAMIC  
TYPE K T/C  
6750-1

GLASS  
#3230  
LID OPER'D  
POWER CUT-OFF  
SWITCH

#6060-1  
#22GA WIRE  
MULTI-COND

#6770 CNTRL  
TRANSFORMER  
OUTPUT=24VAC

FUSE  
#6726  
1/2 AMP

10.7 OHMS  
TOP

10.7 OHMS  
TOP

36 OHMS  
SIDE

36 OHMS  
SIDE

36 OHMS  
SIDE

TO RE-ORDER ELEMENTS, SPECIFY

DESCRIPTION	QTY	LIC
ELS0848S	3	SIDES
ELS0848T	2	TOP

I/C  
CONE FIRE  
SENTRY 2.0  
2350° F

SWITCH BOX ASSY- 4978-2  
PARAGON INDUSTRIES  
2011 SOUTH TOWN EAST BLVD  
MESQUITE, TEXAS 75149

REV DATE BY DESCRIPTION  
6-9-03 JRLG

REV -  
PART NO S0848 -/  
FILE

WIRING DIAGRAM  
240V, 1PHASE, 60HZ, 4800WATTS  
DP1613 SEN-C