


NOTE: GROUNDING SCREW
TO HAVE A GREEN COLORED
SLOTTED AND/OR HEX HEAD
NO SUBSTITUTES. USE #1005

PAL NOTE

NOTE: INSTALL PALLADIUM
SWITCH 180° FROM POSITION
SHOWN TO ENSURE PROPER
ALIGNMENT OF KNOB.

CAUTION

TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDED.

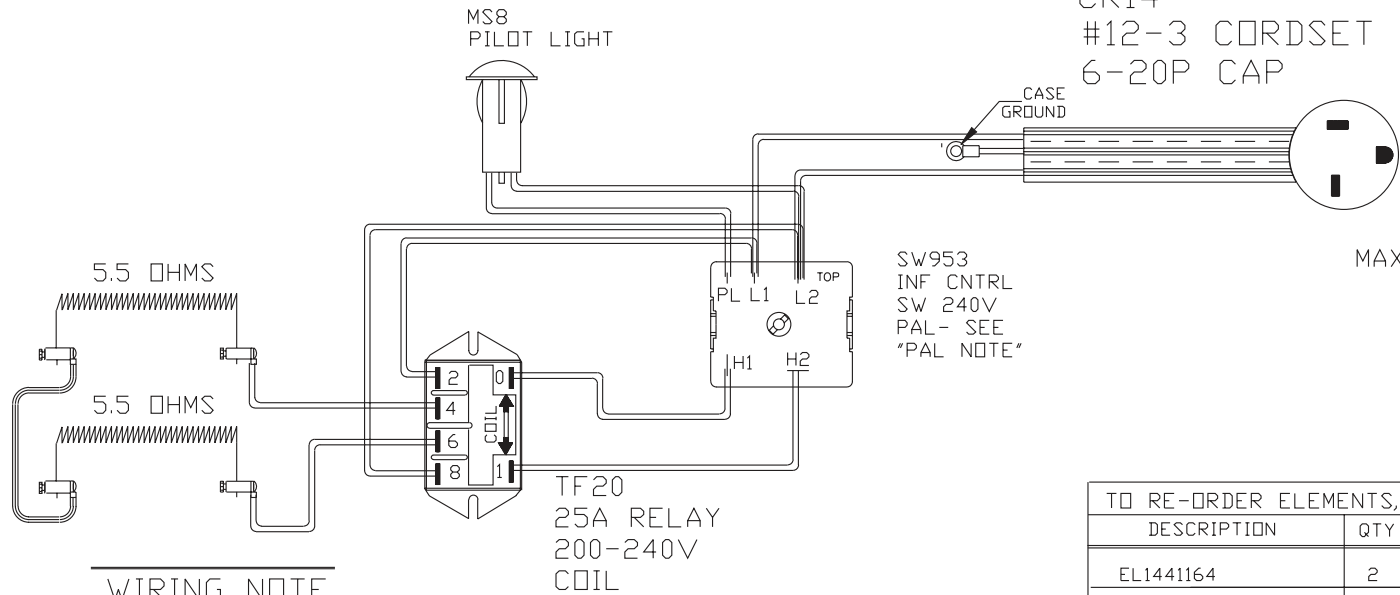

POWER REQ'TS

208 VOLTS
1 PHASE
60 HERTZ
19 AMPS
3950 WATTS

MAX TEMP 2350 °F

SW953
INF CNTRL
SW 240V
PAL - SEE
"PAL NOTE"

TF20
25A RELAY
200-240V
COIL

WIRING NOTE

NOTE: ALL WIRES TO BE
TYPE SEW/SF2, #14 AWG
MINIMUM UNLESS NOTED

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
EL1441164	2	SIDE FIRE

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	<u>PRODUCT DESCRIPTION</u> 13" W, 8.75" H, 13.5" D 208V, 1PH, 60 Z, 19A, 3950W	PART NO.	1441164D00	REV	-
			WIRING DIAGRAM			