


PART NO 22K2211M00

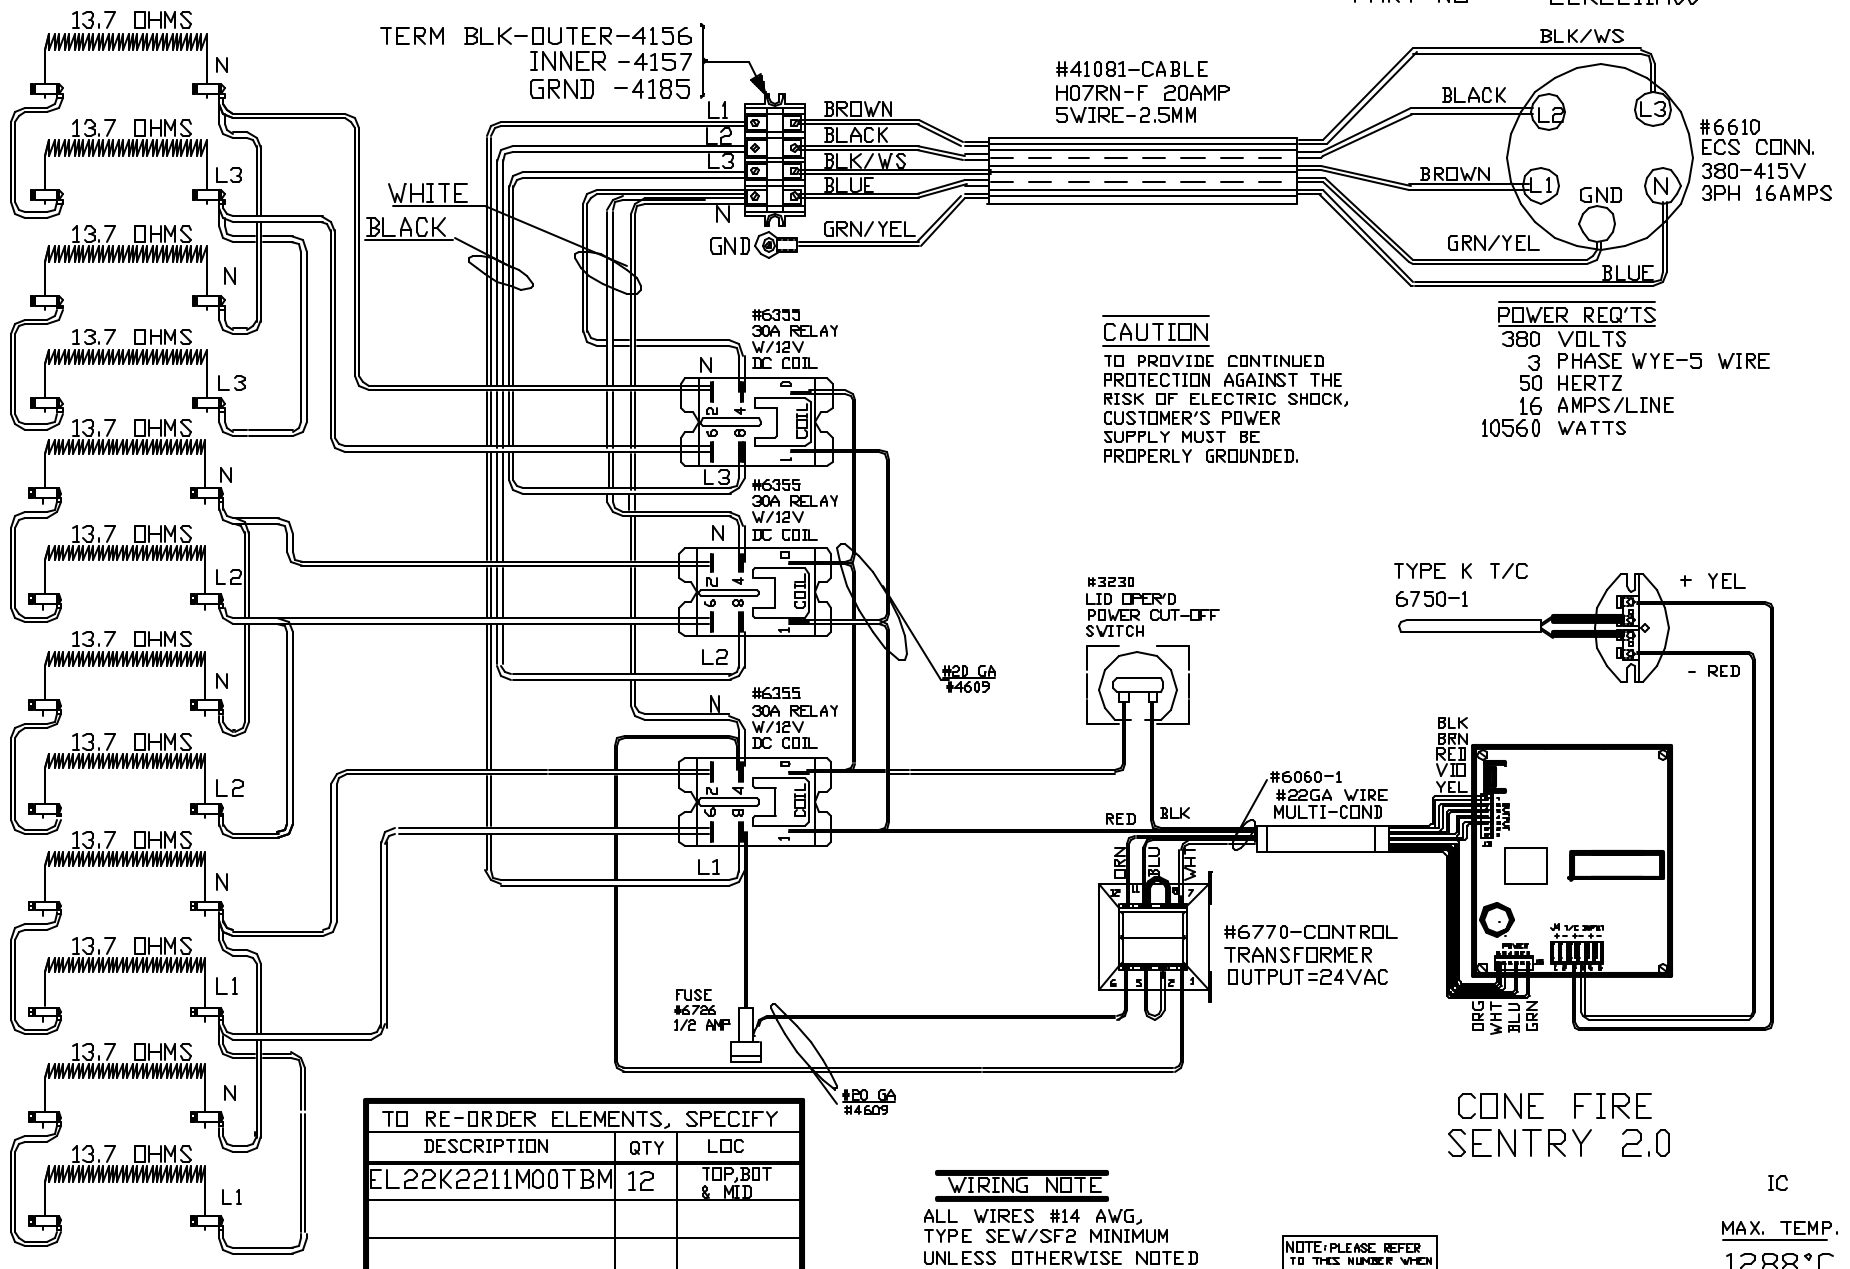

CAUTION
 TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

POWER REQ'TS
 380 VOLTS
 3 PHASE WYE-5 WIRE
 50 HERTZ
 16 AMPS/LINE
 10560 WATTS

TO RE-ORDER ELEMENTS, SPECIFY

DESCRIPTION	QTY	LDC
EL22K2211M00TBM	12	TOP, BOT & MID

WIRING NOTE
 ALL WIRES #14 AWG, TYPE SEW/SF2 MINIMUM UNLESS OTHERWISE NOTED

NOTE: PLEASE REFER TO THIS NUMBER WHEN ORDERING PARTS FOR THIS KILN

CONE FIRE SENTRY 2.0

IC
 MAX. TEMP.
 1288°C
 2350°F

SWITCH BOX ASSY- 42022-5

REV	DATE	BY	DESCRIPTION
-	11/26/96	NJM	
B	7-13-98	NJM	CHGD FUSE, WAS 1/4AMP
C	10-28-99	BP	CHGD CNTRL RD TO 100OC
D	4/2/01	DTB	CHG FROM DTC TO SENTRY
E	1/2/02	DTB	CHG TO DDB

PARAGON INDUSTRIES
 2011 SOUTH TOWN EAST BLVD
 MESQUITE, TEXAS 75149

WIRING DIAGRAM
 380V 3PHASE Y 50HZ 10560WATTS

PART NO.	REV
22K2211M00	E
TNF243-SEN C	FILE