


PART NO 306111G00

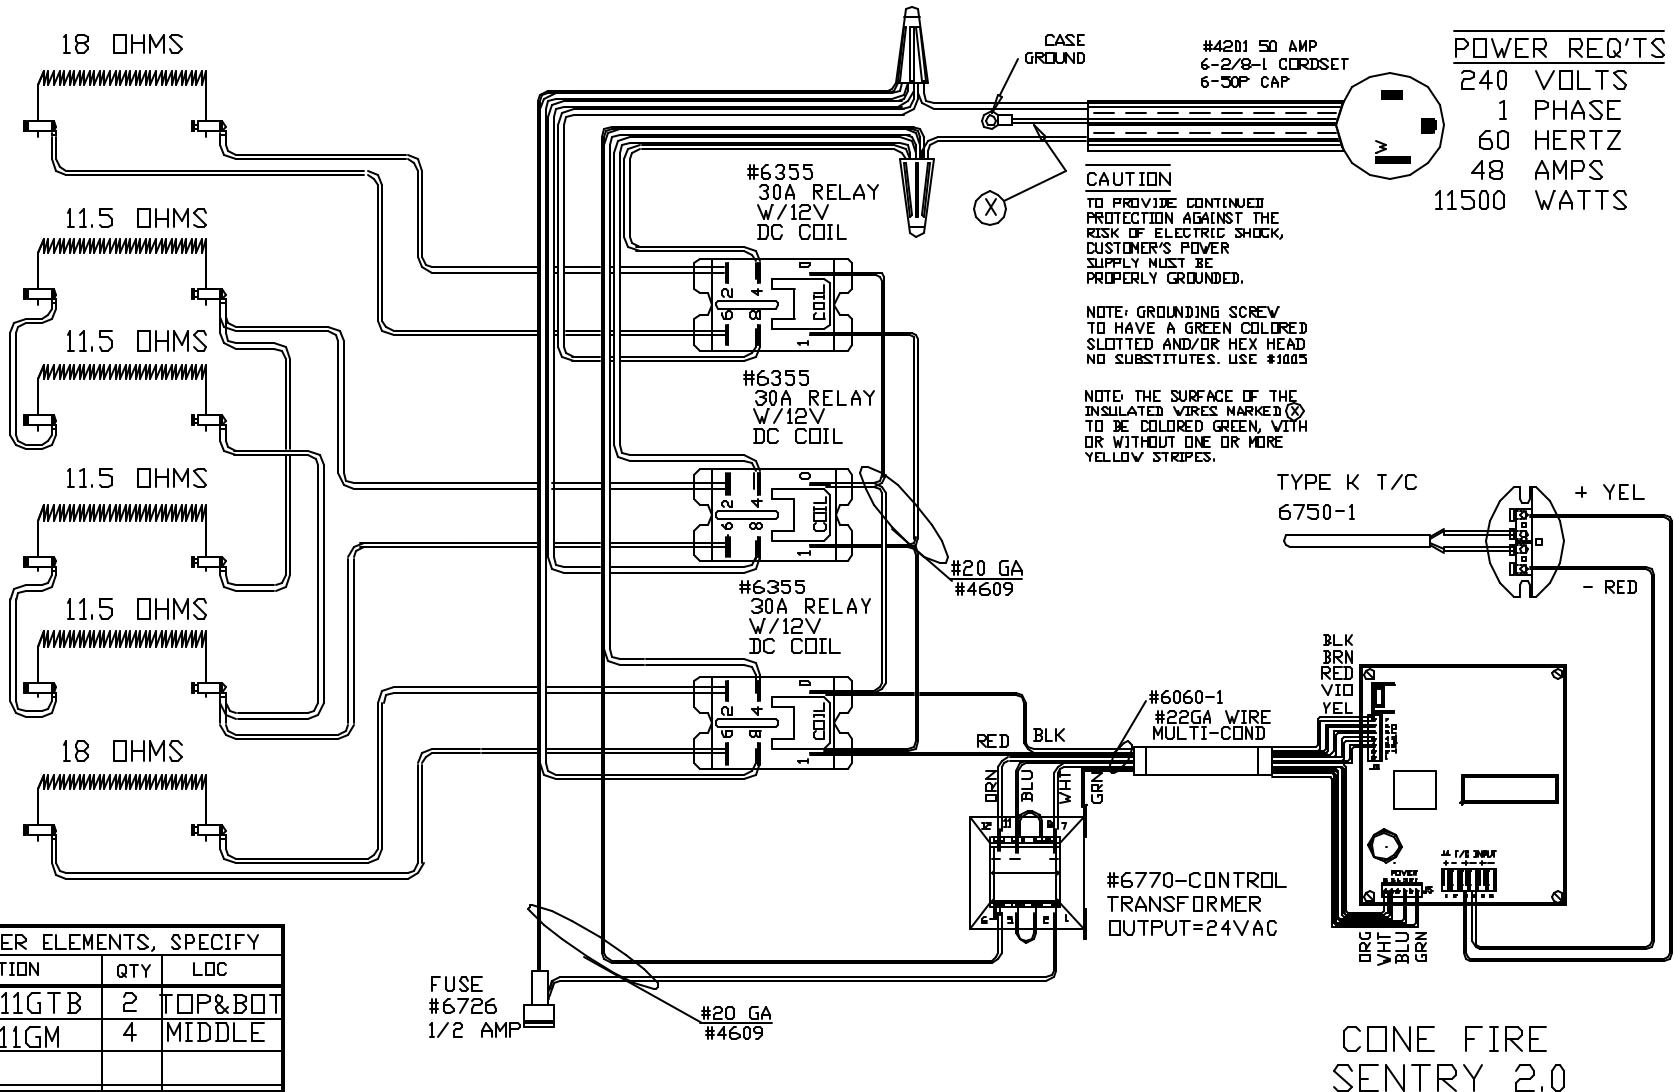

**POWER REQ'TS**  
 240 VOLTS  
 1 PHASE  
 60 HERTZ  
 48 AMPS  
 11500 WATTS

**CAUTION**  
 TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

**NOTE:** GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

**NOTE:** THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

TO RE-ORDER ELEMENTS, SPECIFY

DESCRIPTION	QTY	LOC
EL306111GTB	2	TOP&BOT
EL306111GM	4	MIDDLE

**WIRING NOTE**

NOTE: ALL WIRES TO BE TYPE SEW/SF2, 12 GA AWG MINIMUM UNLESS NOTED

NOTE: PLEASE REFER TO THIS NUMBER WHEN ORDERING PARTS FOR THIS KILN

CONE FIRE SENTRY 2.0  
 CFG 21  
 UL/CUL LISTED  
 CATALOG STANDARD  
 2150° F

REV	DATE	BY	DESCRIPTION
-	3/25/02	DTB	

SWITCH BOX ASSY-42022-1  
 PARAGON INDUSTRIES  
 2011 SOUTH TOWN EAST BLVD  
 MESQUITE, TEXAS 75149

WIRING DIAGRAM  
 240V, 1PHASE ,60HZ 11500WATTS

PART NO	REV
306111G00	-
TNF283 SECTIONAL	FILE