

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELPMT13-1S	2	SIDES


HIGH TEMP CS/HSJ/HSJO  
 #12-3 CORDSET  
 6-20P CAP  
 #60049

POWER REQ'TS  
 208 VOLTS  
 1 PHASE  
 60 HERTZ  
 17 AMPS  
 3600 WATTS

CAUTION  
 TO PROVIDE CONTINUED  
 PROTECTION AGAINST THE  
 RISK OF ELECTRIC SHOCK,  
 CUSTOMER'S POWER  
 SUPPLY MUST BE  
 PROPERLY GROUNDED.

NOTE: GROUNDING SCREW  
 TO HAVE A GREEN COLORED  
 SLOTTED AND/OR HEX HEAD  
 NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE  
 INSULATED WIRES MARKED (X)  
 TO BE COLORED GREEN, WITH  
 OR WITHOUT ONE OR MORE  
 YELLOW STRIPES.

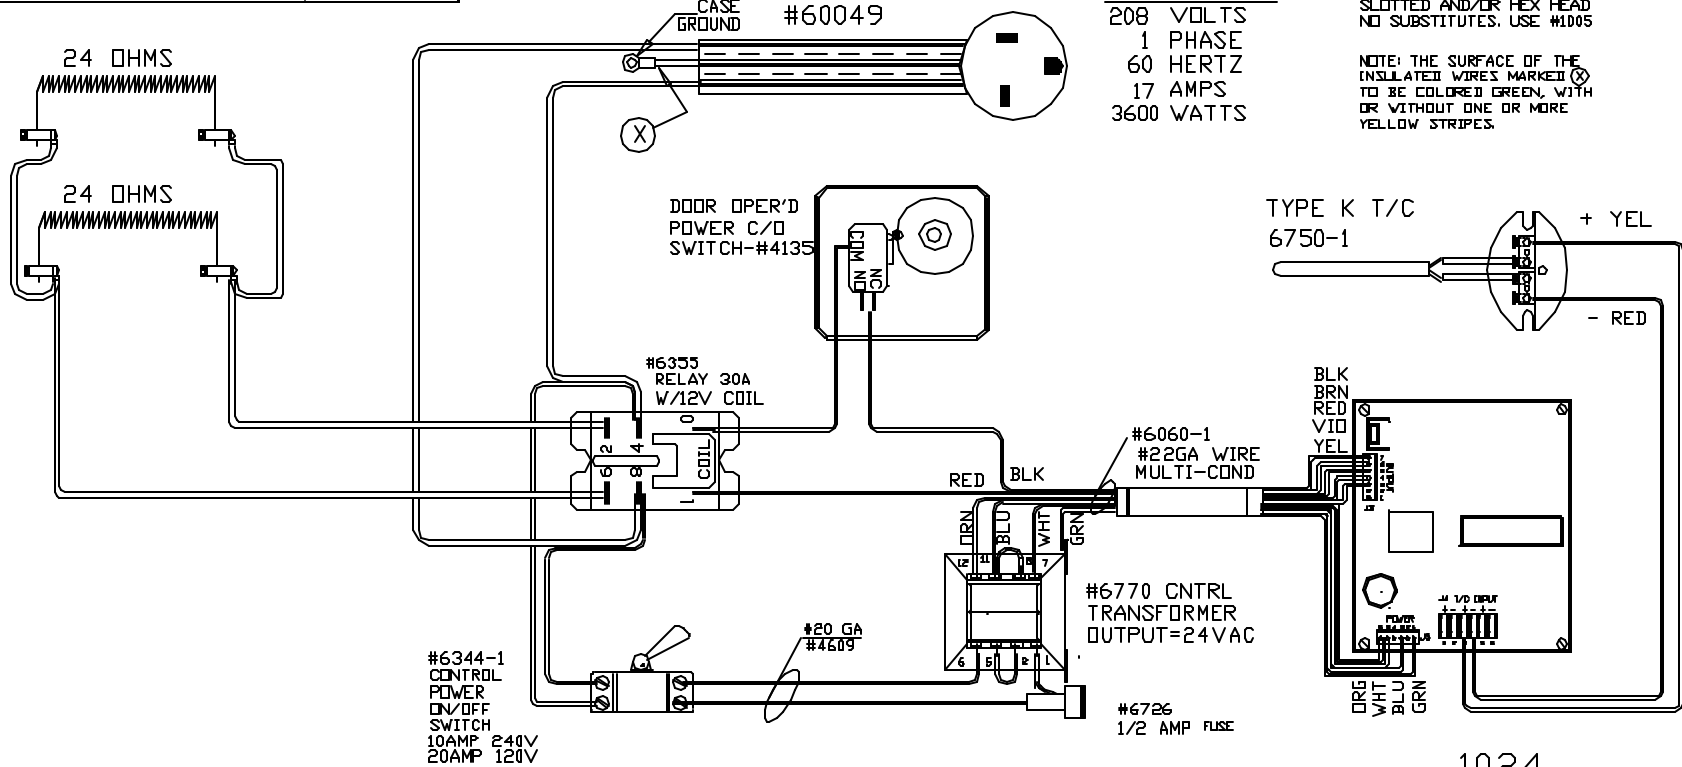

WIRING NOTE

ALL WIRES #14 AWG,  
 TYPE SEW/SF2 MINIMUM  
 UNLESS OTHERWISE NOTED

NOTE: PLEASE REFER  
 TO THIS NUMBER WHEN  
 ORDERING PARTS FOR  
 THIS KILN

1024  
 SENTRY 2.0  
 MAX. TEMP.  
 2350°F

REV	DATE	BY	DESCRIPTION	SWITCH BOX ASSY- 42073	WIRING DIAGRAM	PART NO	REV
-	1-20-05	RLG		PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	208V, 1 PHASE, 60HZ, 3600WATTS	PMT13-1 HT13X8.5X13.5	- FILE