

WIRING NOTE

ALL WIRES #14 AWG,
TYPE SEW/SF2 MINIMUM
UNLESS OTHERWISE NOTED

CAUTION


TO PROVIDE CONTINUED
PROTECTION AGAINST THE
RISK OF ELECTRIC SHOCK,
CUSTOMER'S POWER
SUPPLY MUST BE
PROPERLY GROUNDED.

NOTE: GROUNDING SCREW
TO HAVE A GREEN COLORED
SLOTTED AND/OR HEX HEAD
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE
INSULATED WIRES MARKED ⊗
TO BE COLORED GREEN, WITH
OR WITHOUT ONE OR MORE
YELLOW STRIPES.

MS8
PILOT LIGHT

LT3K-120
120V 60HZ
KILN SITTER
W/LIM. TIMER
4" TUBE
ASSY KS7

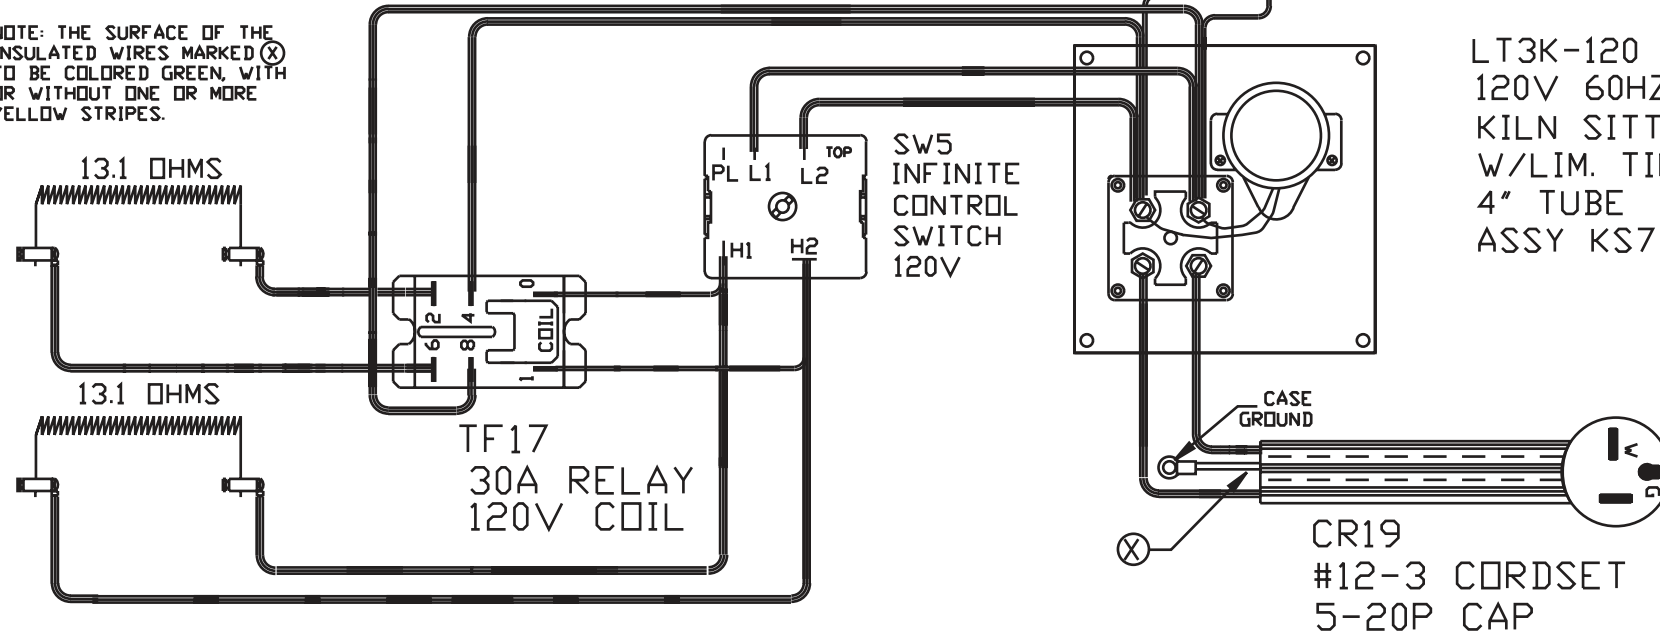

CR19
#12-3 CORDSET
5-20P CAP

POWER REQ'TS

120 VOLTS
1 PHASE
60 HERTZ
18.3 AMPS
2200 WATTS
MAX TEMP 2300° F

UL/CUL LISTED

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELA119	2	SIDE

COMMENTS

PARAGON INDUSTRIES
2011 SOUTH TOWN EAST BLVD
MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION
6 SIDES, 11" DIA, 9" DP
120V, 1PH, 60HZ, 18A, 2160W

<u>PART NO.</u>	S1193	<u>REV</u>	-
<u>WIRING DIAGRAM</u>			