

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELSNF66TB	2	TOP&BOT
ELSNF66M	2	MIDDLE

**CAUTION**

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.


**POWER REQ'TS**

240 VOLTS  
 1 PHASE  
 60 HERTZ  
 15 AMPS  
 3600 WATTS  
 MAX TEMP 2300° F

**WIRING NOTE**

NOTE: ALL WIRES TO BE TYPE SEW/SF2, #14 AVG MINIMUM UNLESS NOTED

UL/CUL LISTED

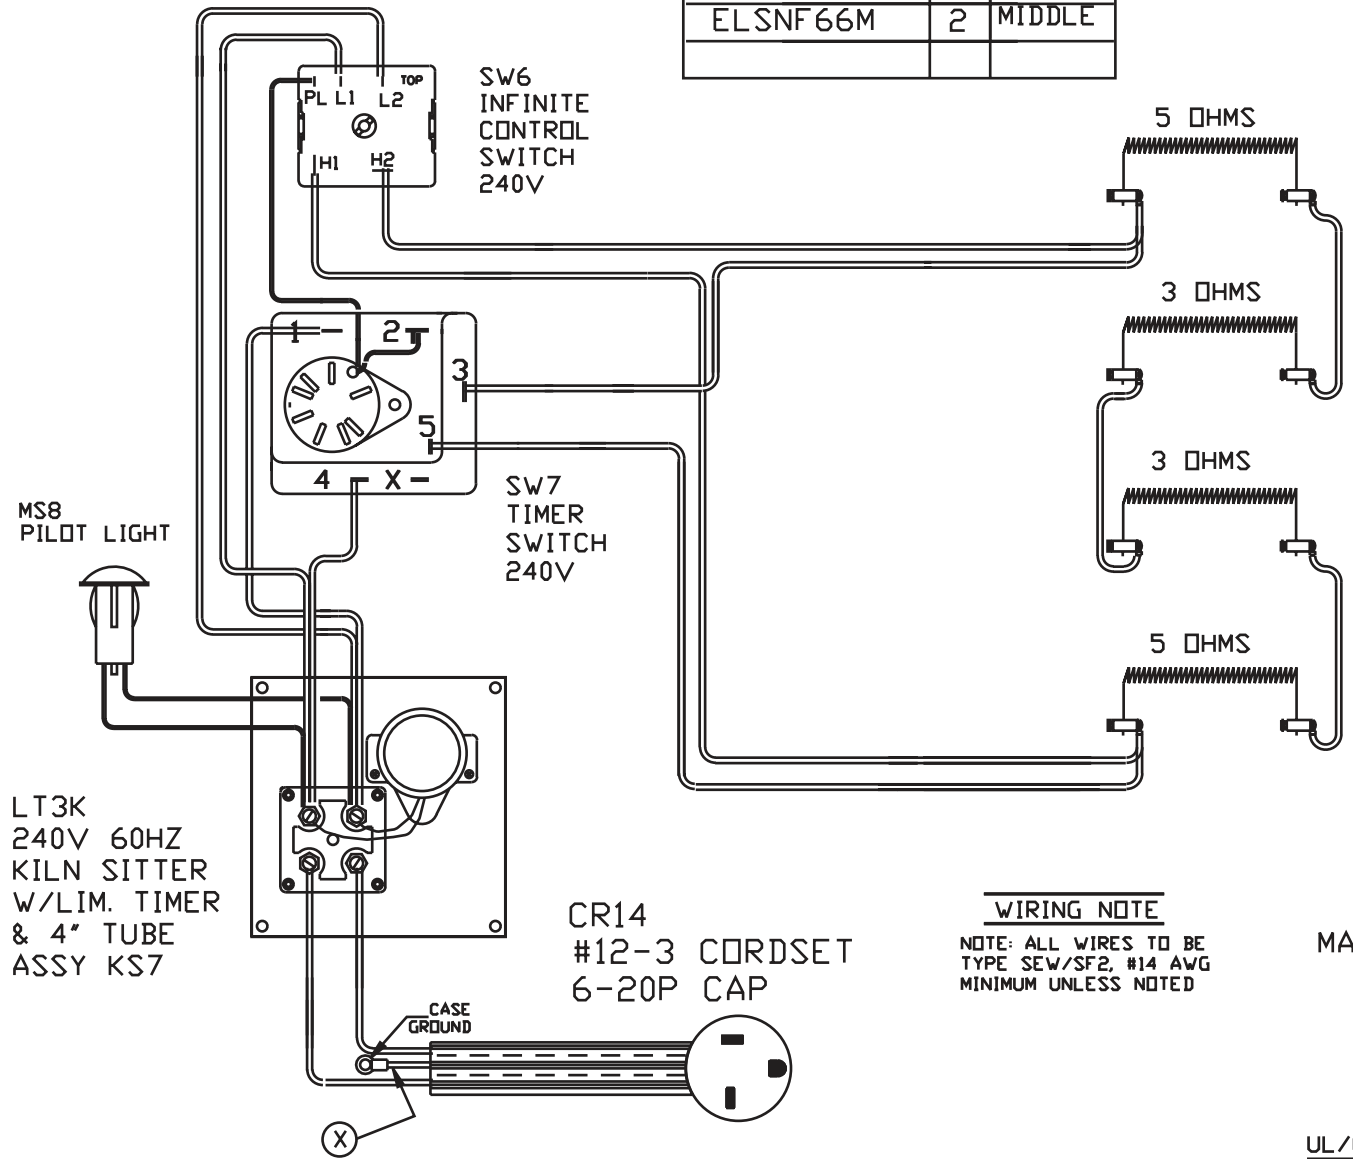

COMMENTS

PARAGON INDUSTRIES  
 2011 SOUTH TOWN EAST BLVD  
 MESQUITE, TEXAS 75149

**PRODUCT DESCRIPTION**  
 7 SIDES, 14.5" DIA, 13.25" DP  
 240V, 1PH, 60HZ, 15A, 3600W

**PART NO.** SNF66  
**REV** -  
**WIRING DIAGRAM**