


CAUTION

TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #100S

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

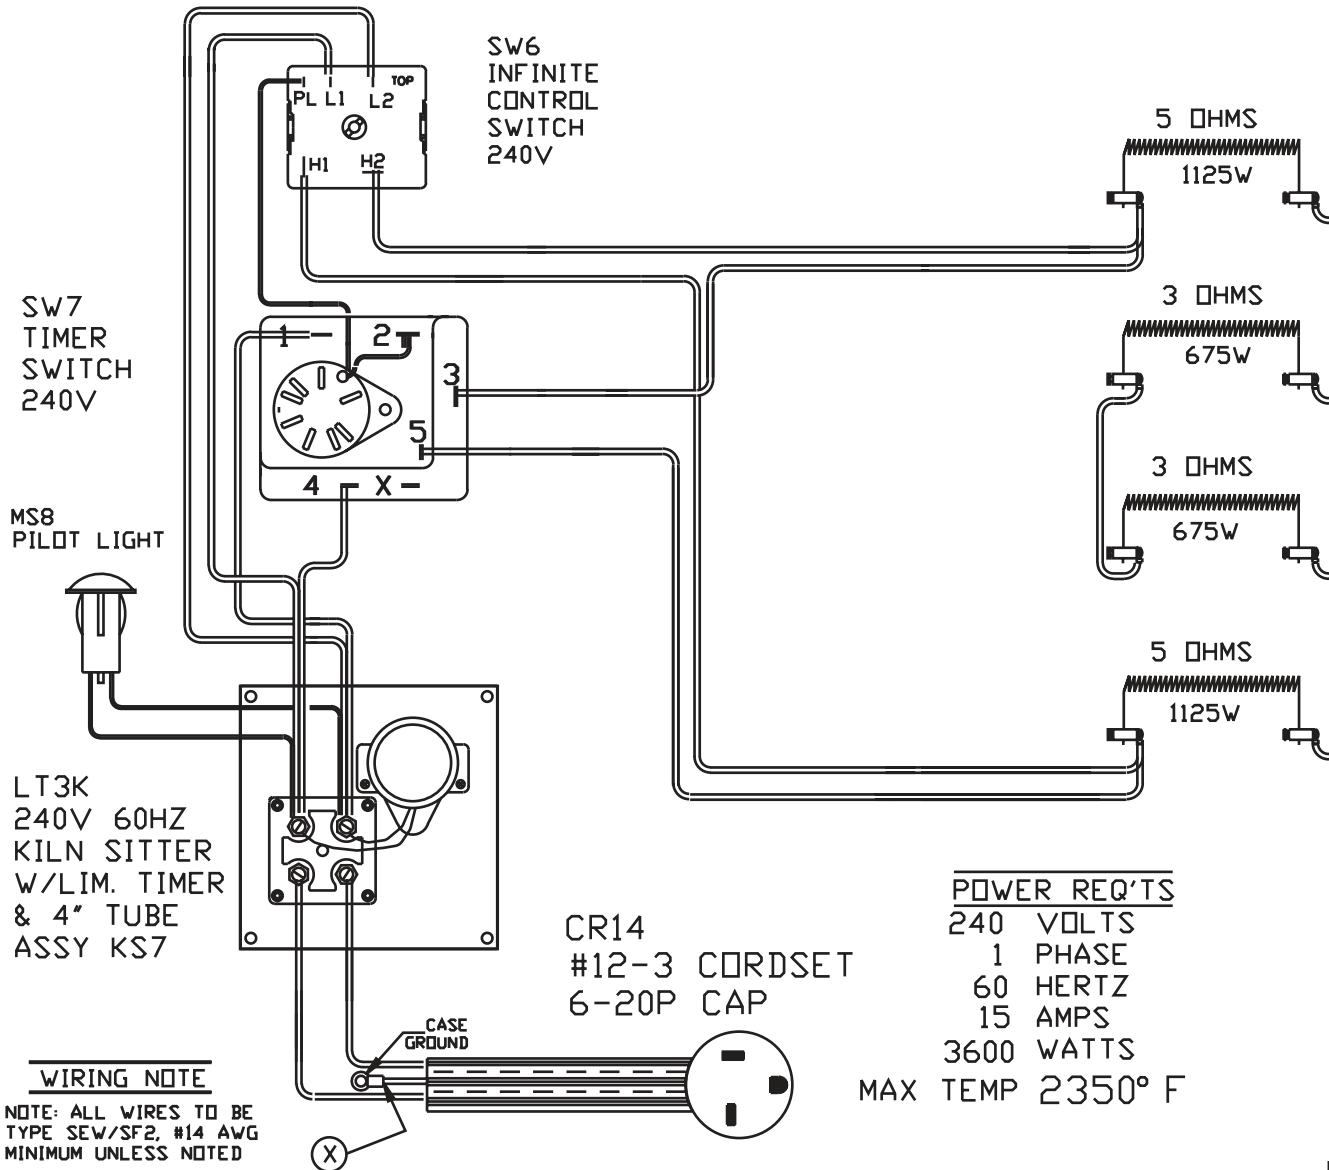

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LDC
ELSNF663TB	2	TOP&BOT
ELSNF663M	2	MIDDLE

POWER REQ'TS

240 VOLTS
 1 PHASE
 60 HERTZ
 15 AMPS
 3600 WATTS
 MAX TEMP 2350° F

WIRING NOTE

NOTE: ALL WIRES TO BE TYPE SEW/SF2, #14 AWG MINIMUM UNLESS NOTED

UL/CUL LISTED

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	PRODUCT DESCRIPTION		PART NO.	REV
		7 SIDES, 13.5" DIA, 13.25" DP 240V, 1PH, 60HZ, 15A, 3600W		SNF663	-
WIRING DIAGRAM					