

WIRING NOTE


ALL WIRES #14 AWG,  
TYPE SEW/SF2 MINIMUM  
UNLESS OTHERWISE NOTED

CAUTION

TO PROVIDE CONTINUED  
PROTECTION AGAINST THE  
RISK OF ELECTRIC SHOCK,  
CUSTOMER'S POWER  
SUPPLY MUST BE  
PROPERLY GROUNDED.

NOTE: GROUNDING SCREW  
TO HAVE A GREEN COLORED  
SLOTTED AND/OR HEX HEAD  
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE  
INSULATED WIRES MARKED ⊗  
TO BE COLORED GREEN, WITH  
OR WITHOUT ONE OR MORE  
YELLOW STRIPES.

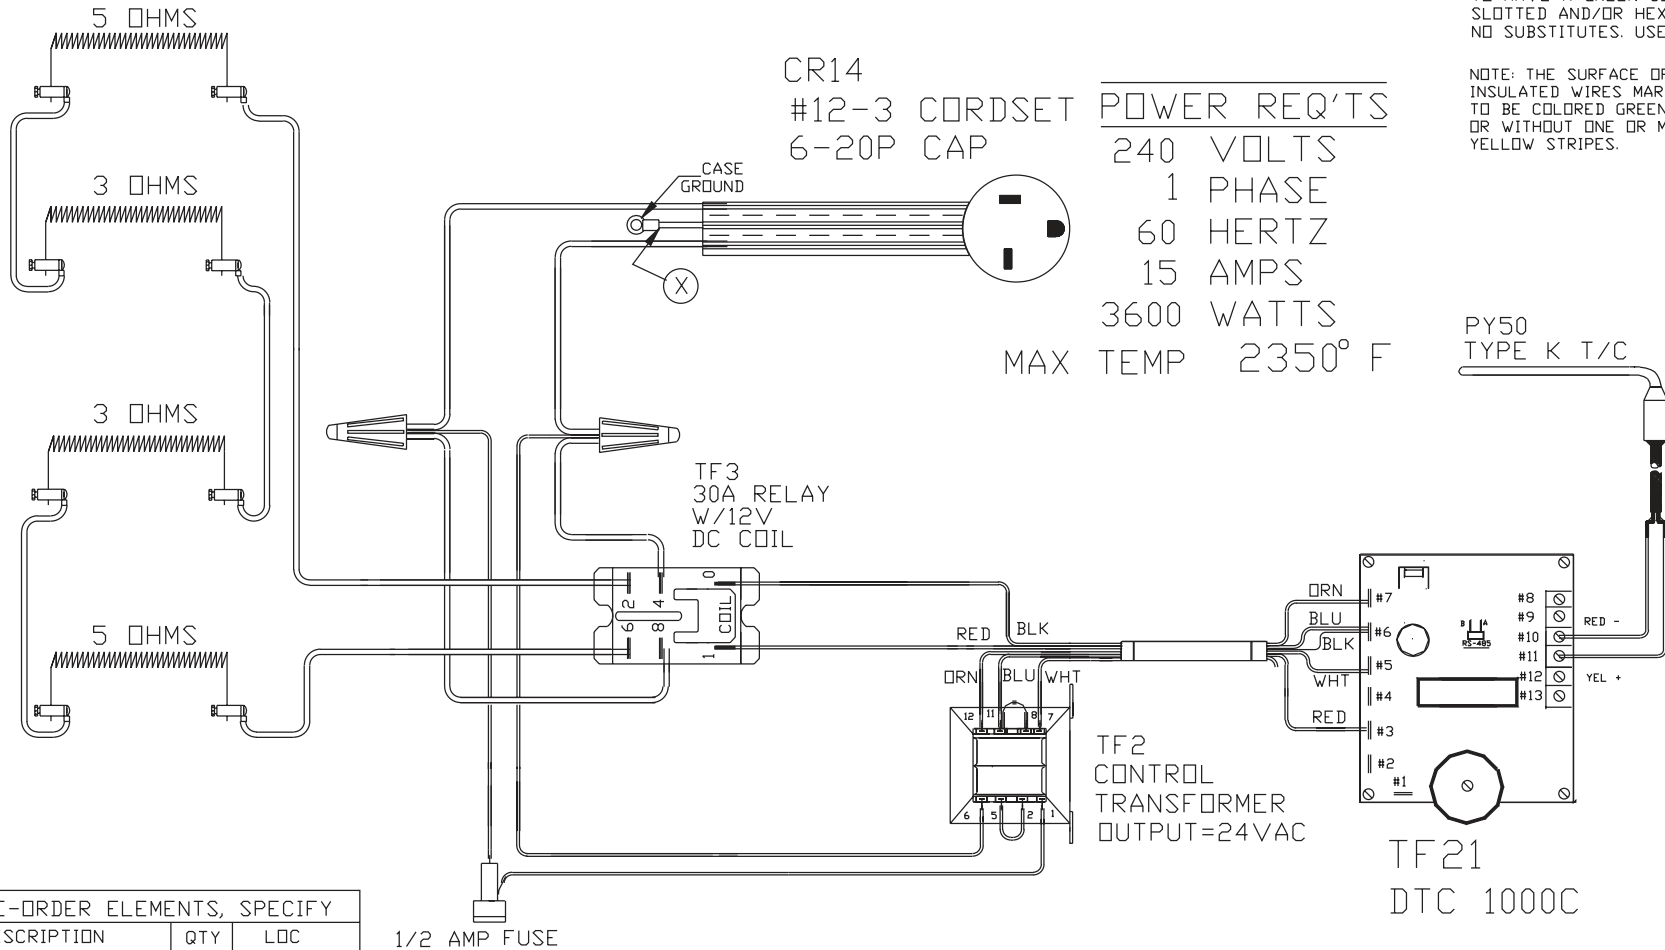

<u>POWER REQ'TS</u>	
240	VOLTS
1	PHASE
60	HERTZ
15	AMPS
3600	WATTS
MAX	TEMP 2350° F

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELTNF663TB	2	TOP&BOT
ELTNF663M	2	MID

UL/CUL LISTED

COMMENTS	PARAGON INDUSTRIES 2011 SOUTH TOWN EAST BLVD MESQUITE, TEXAS 75149	<u>PRODUCT DESCRIPTION</u>		PART NO. TNF663 WIRING DIAGRAM	REV -
		7 SIDES, 13.5" DIA, 13.25" DP 240V, 1PH, 60HZ, 15A, 3600W			