

WIRING NOTE

ALL WIRES #14 AWG,  
TYPE SEW/SF2 MINIMUM  
UNLESS OTHERWISE NOTED

TOP  
ELEMENT

CAUTION

TO PROVIDE CONTINUED  
PROTECTION AGAINST THE  
RISK OF ELECTRIC SHOCK,  
CUSTOMER'S POWER  
SUPPLY MUST BE  
PROPERLY GROUNDED.


NOTE: GROUNDING SCREW  
TO HAVE A GREEN COLORED  
SLOTTED AND/OR HEX HEAD  
NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE  
INSULATED WIRES MARKED ⊗  
TO BE COLORED GREEN, WITH  
OR WITHOUT ONE OR MORE  
YELLOW STRIPES.

POWER REQ'TS

240 VOLTS  
1 PHASE  
60 HERTZ  
45 AMPS  
10800 WATTS  
MAX TEMP 2350° F

UL/CUL LISTED

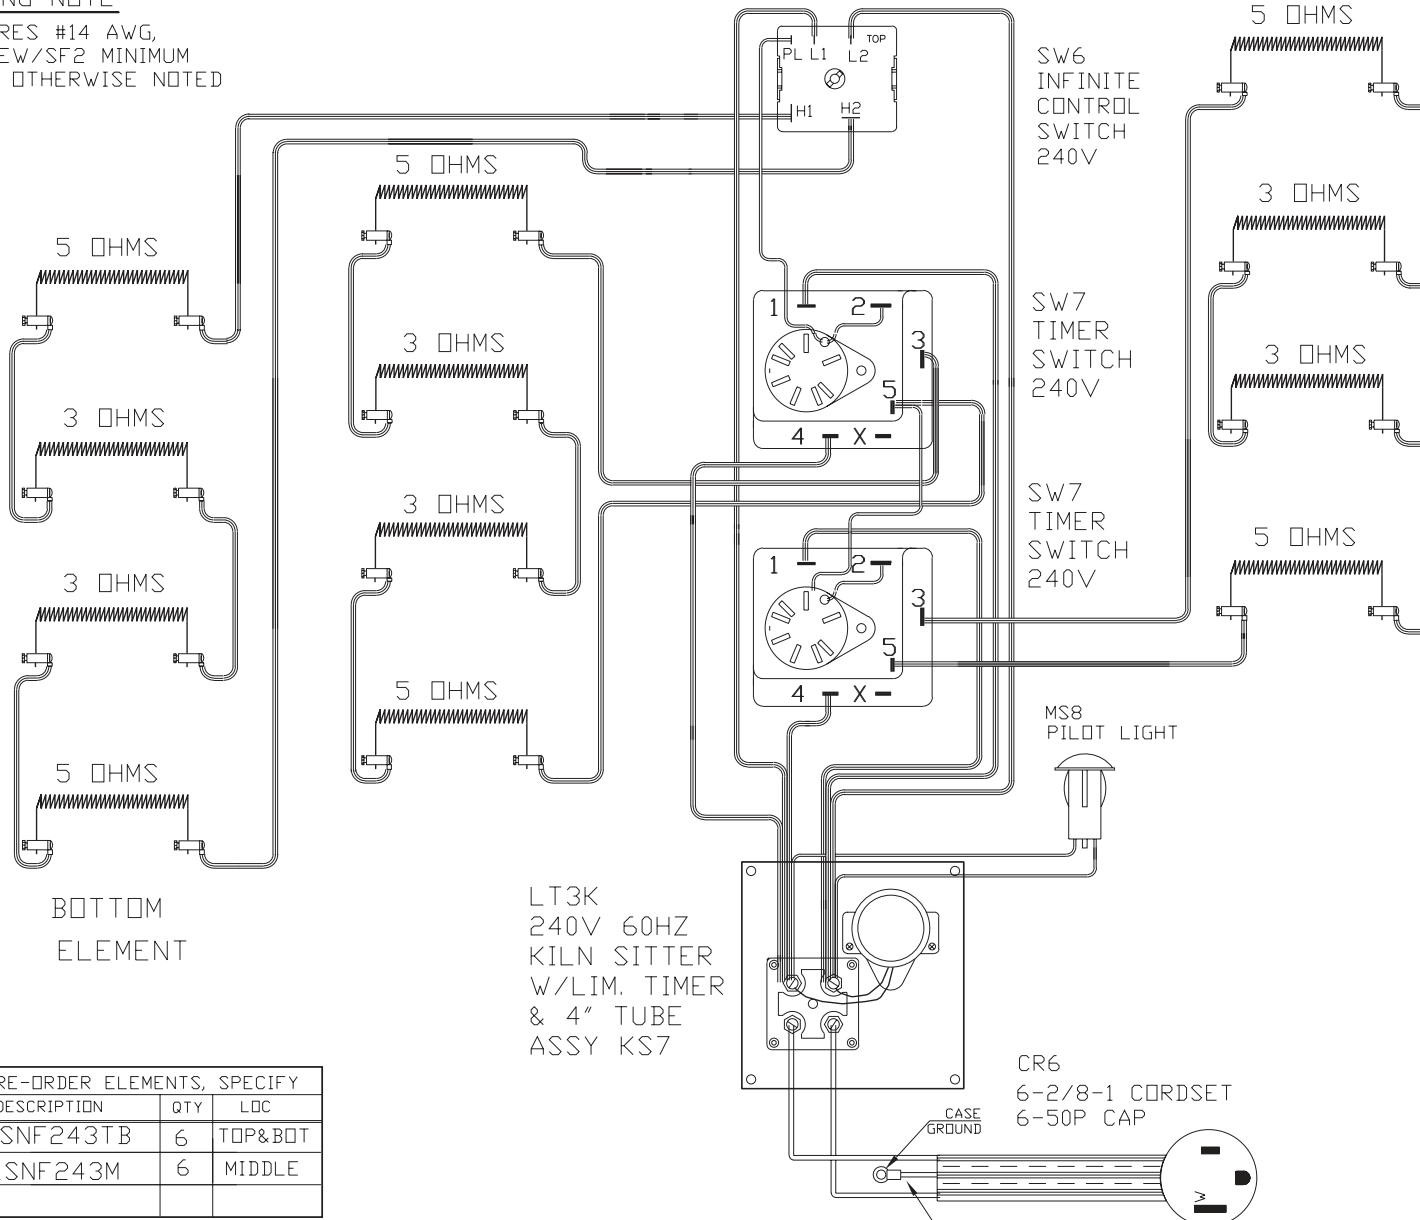

BOTTOM  
ELEMENT

LT3K  
240V 60HZ  
KILN SITTER  
W/LIM. TIMER  
& 4" TUBE  
ASSY KS7

CR6  
6-2/8-1 CORDSET  
6-50P CAP

MS8  
PILOT LIGHT

SW6  
INFINITE  
CONTROL  
SWITCH  
240V

SW7  
TIMER  
SWITCH  
240V

SW7  
TIMER  
SWITCH  
240V

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELSNF243TB	6	TOP&BOT
ELSNF243M	6	MIDDLE

COMMENTS

PARAGON INDUSTRIES  
2011 SOUTH TOWN EAST BLVD  
MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION  
10 SIDES, 22.5" DIA, 29" DP  
240V, 1PH, 60HZ, 45A, 10800W

PART NO.

SNF243

REV

-

WIRING DIAGRAM