


TOP

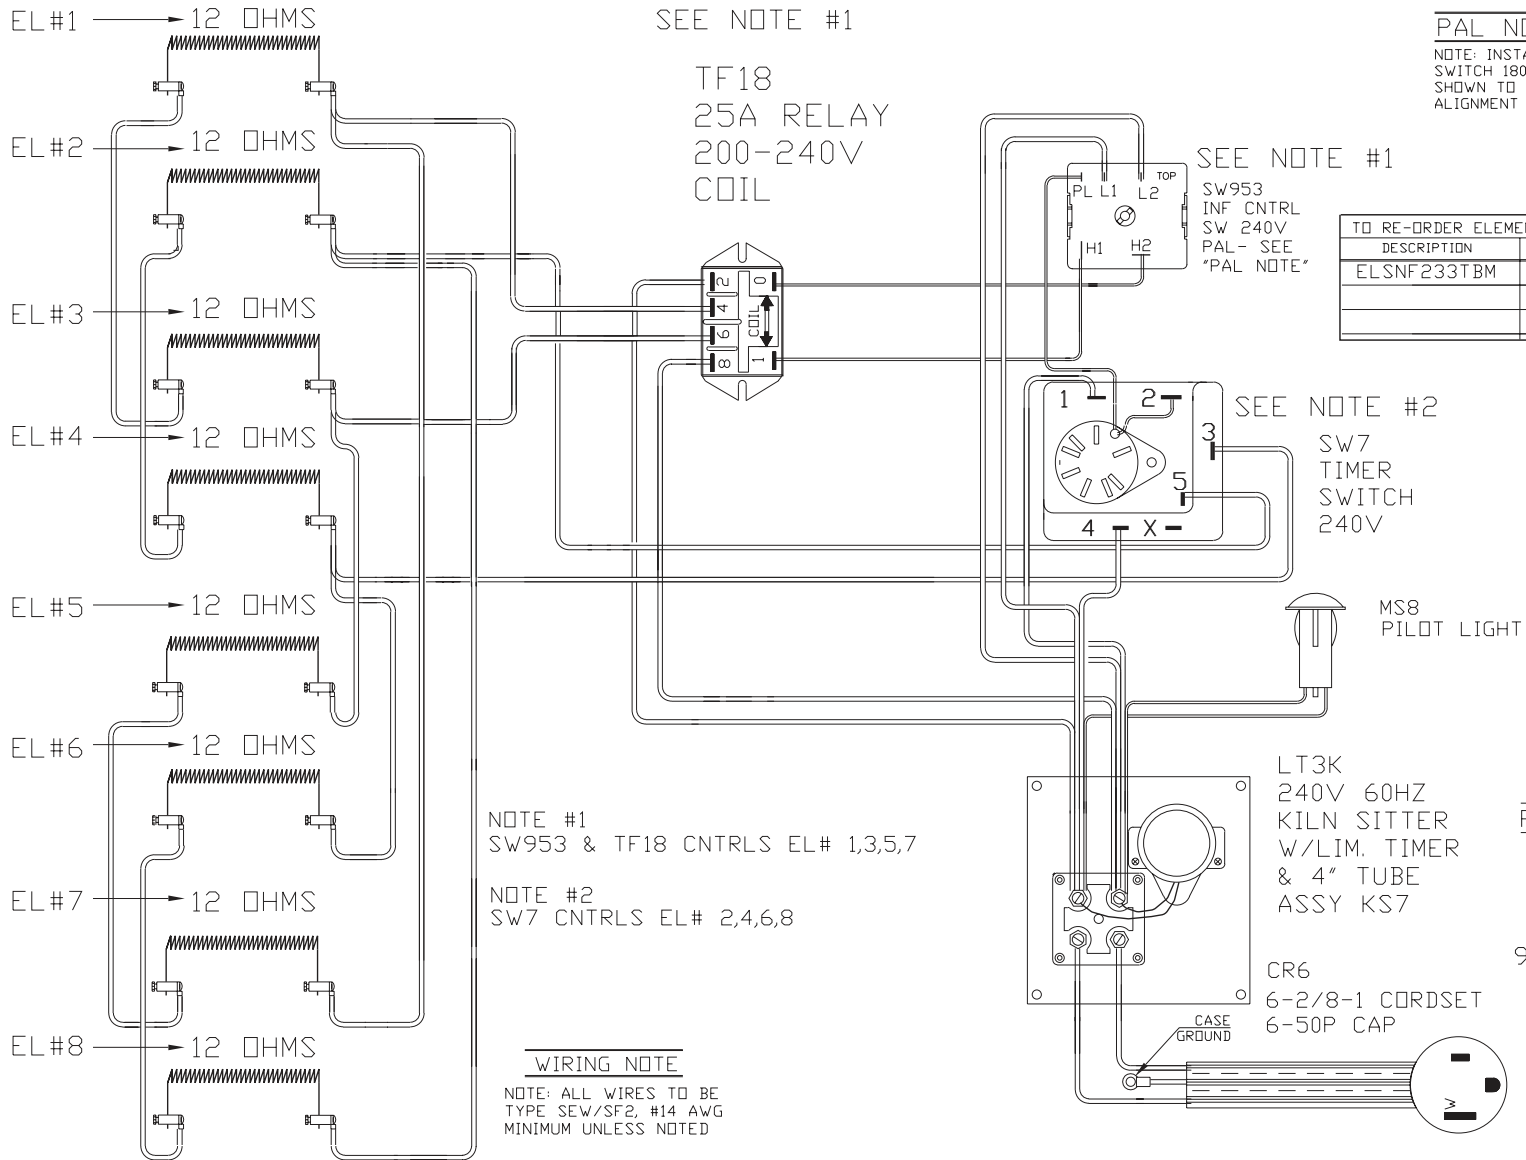

SEE NOTE #1
 TF18
 25A RELAY
 200-240V
 COIL

PAL NOTE

NOTE: INSTALL PALLADIUM SWITCH 180° FROM POSITION SHOWN TO ENSURE PROPER ALIGNMENT OF KNOB.

SEE NOTE #1

SW953
 INF CNTRL
 SW 240V
 PAL- SEE
 'PAL NOTE'

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELSNF233TBM	8	TOP, BOT & MID

SEE NOTE #2

SW7
 TIMER
 SWITCH
 240V

MS8
 PILOT LIGHT

LT3K
 240V 60HZ
 KILN SITTER
 W/LIM. TIMER
 & 4" TUBE
 ASSY KS7

POWER REQ'TS	
240 VOLTS	1 PHASE
60 HERTZ	40 AMPS
9600 WATTS	

CR6
 6-2/8-1 CORDSET
 6-50P CAP

NOTE #1
 SW953 & TF18 CNTRLS EL# 1,3,5,7

NOTE #2
 SW7 CNTRLS EL# 2,4,6,8

WIRING NOTE

NOTE: ALL WIRES TO BE
 TYPE SEW/SF2, #14 AWG
 MINIMUM UNLESS NOTED

MAX TEMP 2350° F

COMMENTS

PARAGON INDUSTRIES
 2011 SOUTH TOWN EAST BLVD
 MESQUITE, TEXAS 75149

PRODUCT DESCRIPTION
 10 SIDES 22.5" DIA, 22.25" DP
 240V, 1PH, 60HZ, 40A, 9600W

PART NO. SNF233

WIRING DIAGRAM

REV
 -